


FS2MP10-2020-2300-S

Cavity Diplexer Specifications

Electrical Specifications			
1	Frequency Range	2070	2250
		2020~2120MHz	2200~2300MHz
2	Insertion Loss	≤0.8dB	≤0.8dB
3	Ripple	≤0.5dB	≤0.5dB
4	VSWR	≤1.50:1	≤1.50:1
5	Rejection	≥60dB@2200~2300MHz	≥60dB@2020~2120MHz
6	Power	10W CW	
Environmental Characteristics			
1	Operating Temperature	-40℃~+85℃	
2	Environmental Class	Indoor	
Mechanical Characteristics			
1	Connectors	SMA-Female	
2	Surface Finishing	Black Paint	
3	Dimensions ¹	76*65*20mm [2.99*2.56*0.79in]	

Outline Drawing

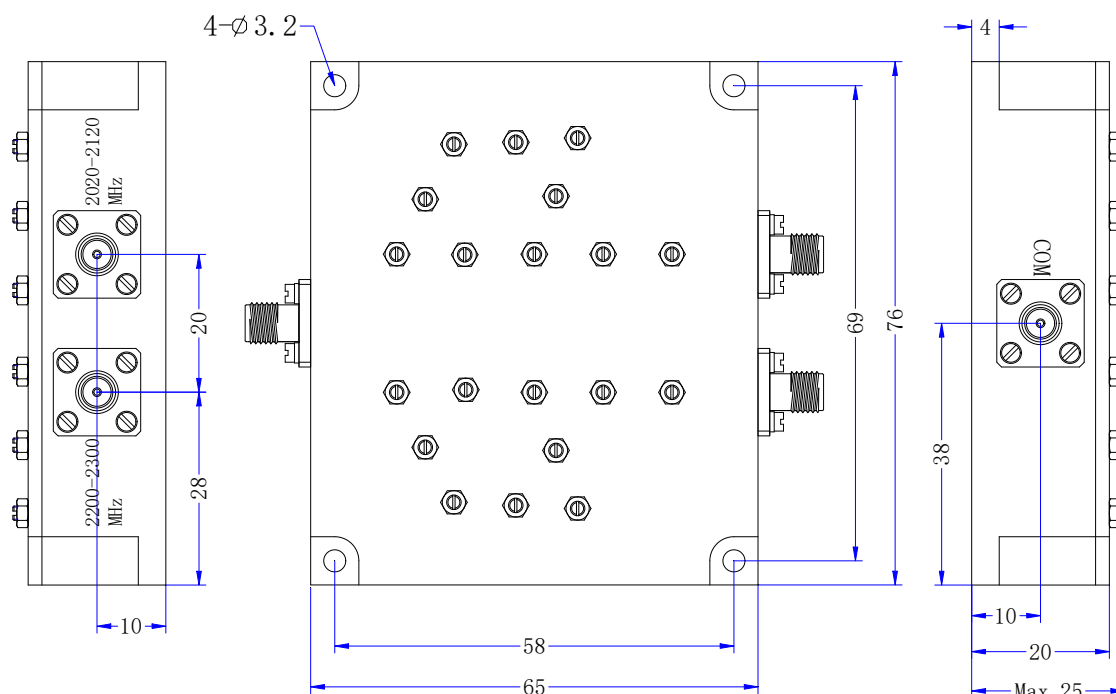

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

