


FS67TR

67GHz, 50 Ohm, Φ 4.8mm, PTFE Armor, Flexible Cable. Solid Inner Conductor

Structure:

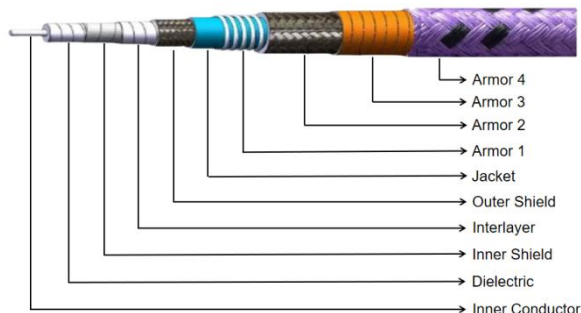

Structure Details:

Cable Type	Dia.(mm)	Material
Inner Conductor	0.5	Silver plated Copper
Dielectric	1.38	Low Density PTFE
Inner Shield	1.54	Silver Plated Copper Strip
Interlayer	1.82	Low Density PTFE
Outer Shield	2.17	Silver Plated Copper Braid
Jacket	2.45	FEP
Armor 1-2	3.60	Silver plated Copper
Armor 3-4	4.80	PTFE

*Armor is optional. Without armor, cable designation is FS67T. With armor, the cable designation is FS67TR.

Electrical Specifications:

Operating Freq.: 67 GHz

Cut-off Freq.: 82 GHz

Impedance: 50 Ω

VSWR: $\leq 1.3@67\text{GHz}$

Phase Stability: $\pm 7^\circ$

Amplitude Stability: $\pm 0.05\text{dB}$

Velocity of Propagation: 81%

Shielding Effectiveness: $>90\text{ dB}$

Dielectric Withstanding Voltage: 800 V DC

Mechanical Specifications:

Static Bending Radius: 13 mm (without armor)

24 mm (with armor)

Dynamic Bending Radius: 25 mm (without armor)

48 mm (with armor)

Bending Life: 100,000

Weight: 16 g/m (without armor)

52 g/m (with armor)

Environmental Specifications:

Temperature: $-55\sim+125\text{ }^\circ\text{C}$

Typical Attenuation(dB/100m) and Power handling (W)

Freq.(GHz)	1	2	3	6	8	10	12.4	18	26.5	40	67
Attenuation ¹	63.7	90.8	111.9	160.4	186.5	209.8	235.2	287.1	354.0	444.0	593.2
Avg. Power ²	110	77	63	44	38	33	30	24	20	16	12
K1: 1.975832, K2: 0.001221											

1: Typical value@+25 $^\circ\text{C}$, VSWR=1.0;

2: Typical value@+40 $^\circ\text{C}$, atmospheric pressure;

3: Typical Cable Attenuation Calculation, Formula: $K1*\sqrt{F(\text{MHz})} + K2*F(\text{MHz})$;

4: Typical Connector Attenuation Calculation, Formula: $0.03*\sqrt{F(\text{GHz})}$.

Cable Assemblies Naming Rule:

PN: Cable-Max. Freq.-Conn.1-Conn.2-Length(m)

Eg.: FS67TR-67-VM-VF-1 means FS67TR cable, with armor, DC-67GHz, 1.85mm(m)-1.85mm(f), 1m.