


FS2MP10-902-2482-N

Cavity Diplexer Specifications

Electrical Specifications			
1	Frequency Range	CH1	CH2
		902~928MHz	2400~2482MHz
2	Insertion Loss	≤1.6dB	≤1.2dB
3	VSWR	≤1.50:1	≤1.50:1
4	Isolation	≥50dB@902~928MHz & 2400~2482MHz	
5	Power	10W CW	
Environmental Characteristics			
1	Operating Temperature	-45°C~+85 °C	
2	Environmental Class	Indoor, IP54	
Mechanical Characteristics			
1	Connectors	N-Female	
2	Surface Finishing	Natural Conductive Oxidation	
3	Dimensions ¹	69.85*60.96*40.5mm [2.75*2.4*1.6in]	

Outline Drawing

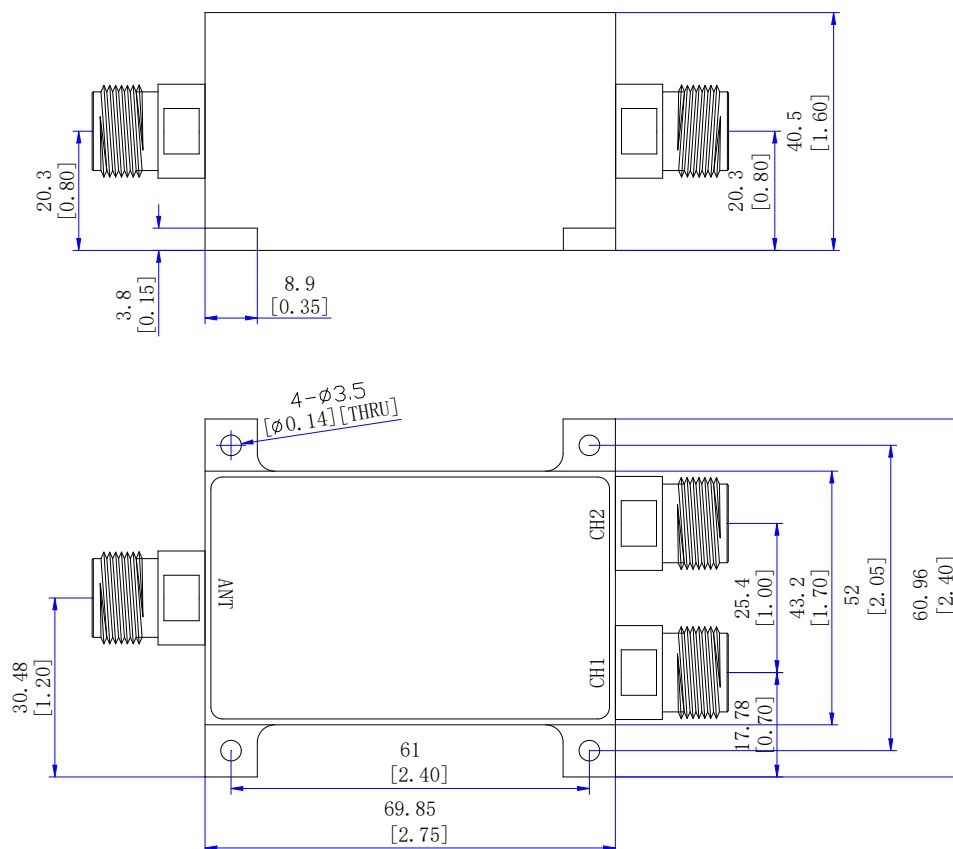

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

