


FS2MP20-2400-5850-S

Diplexer Specifications

Electrical Specifications			
1	Frequency Range	RX	TX
		2400~2480MHz	5725~5850MHz
2	Insertion Loss	≤1.50dB	≤1.50dB
3	VSWR	≤1.30:1	≤1.30:1
4	Rejection	≥50dB@DC~2350MHz ≥50dB@2530~6000MHz	≥50dB@DC~5625MHz ≥50dB@5950~8000MHz
5	Power	20W	
Environmental Characteristics			
1	Operating Temperature	-20°C~+60°C	
2	Environmental Class	Indoor	
Mechanical Characteristics			
1	Connectors	SMA-Female	
2	Surface Finishing	Black Paint	
3	Dimensions ¹	78*68*20mm [3.07*2.68*0.79in]	

Outline Drawing

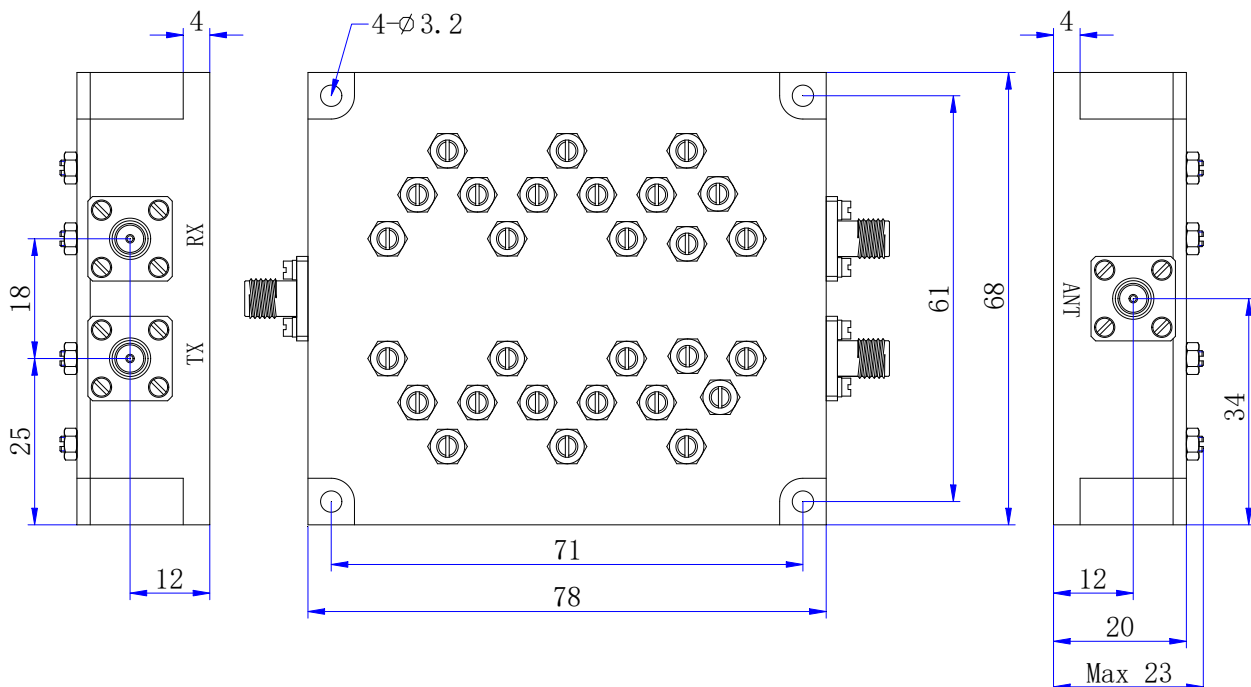

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

