


FS2MP50-2000-2400-N

Diplexer Specifications


Electrical Specifications			
1	Frequency Range	RX	TX
		2000~2150MHz	2200~2400MHz
2	Insertion Loss	≤1.0dB	≤1.0dB
3	VSWR	≤1.40:1	≤1.40:1
4	Isolation	≥60dB@2000~2150MHz,2200~2400MHz	
5	Power	ANT@50W,RX/TX@20W	
Environmental Characteristics			
1	Operating Temperature	-40°C~+70°C	
2	Environmental Class	Indoor	
Mechanical Characteristics			
1	Connectors	N-Female	
2	Surface Finishing	Black Paint	
3	Dimensions ¹	156*81*25mm [6.14*3.19*0.98in]	

Outline Drawing

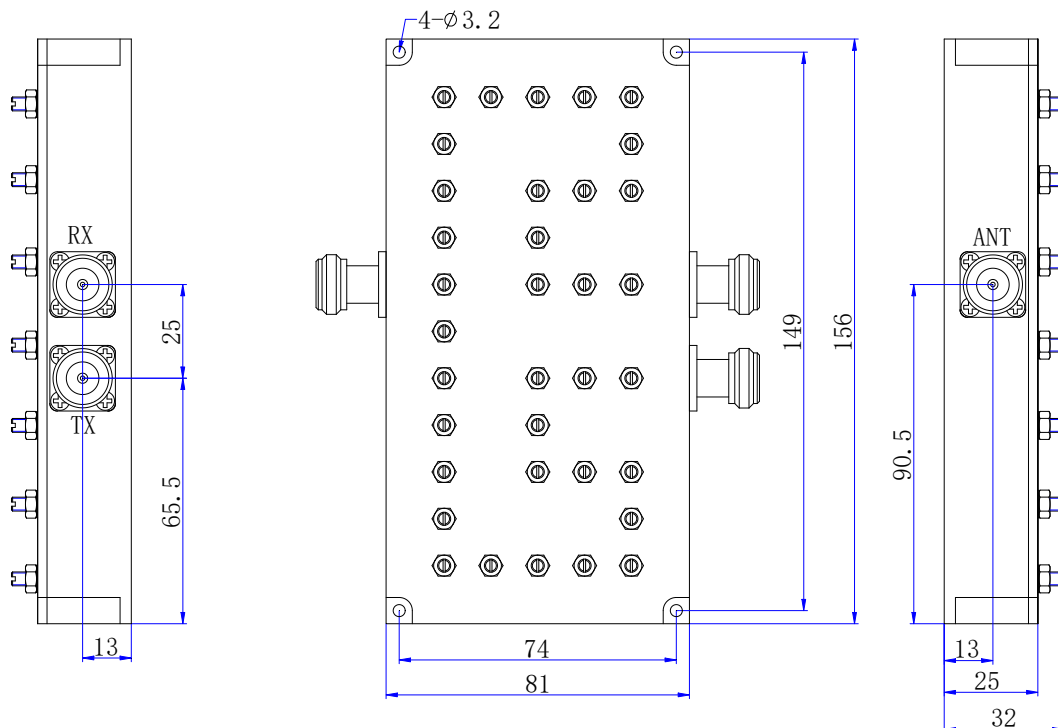

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm


Note 1: Excluding Connectors

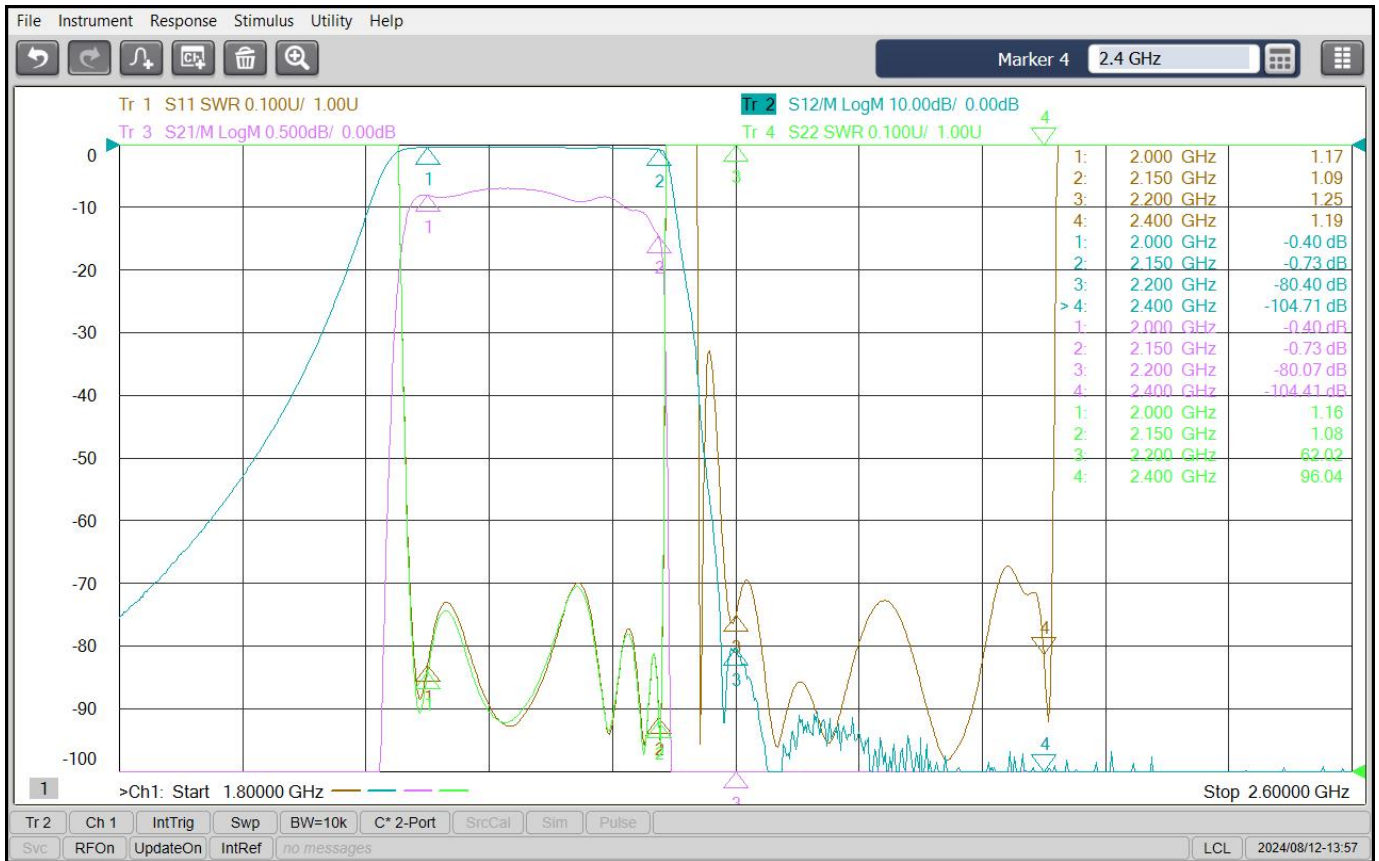

2075-RX



2300-TX

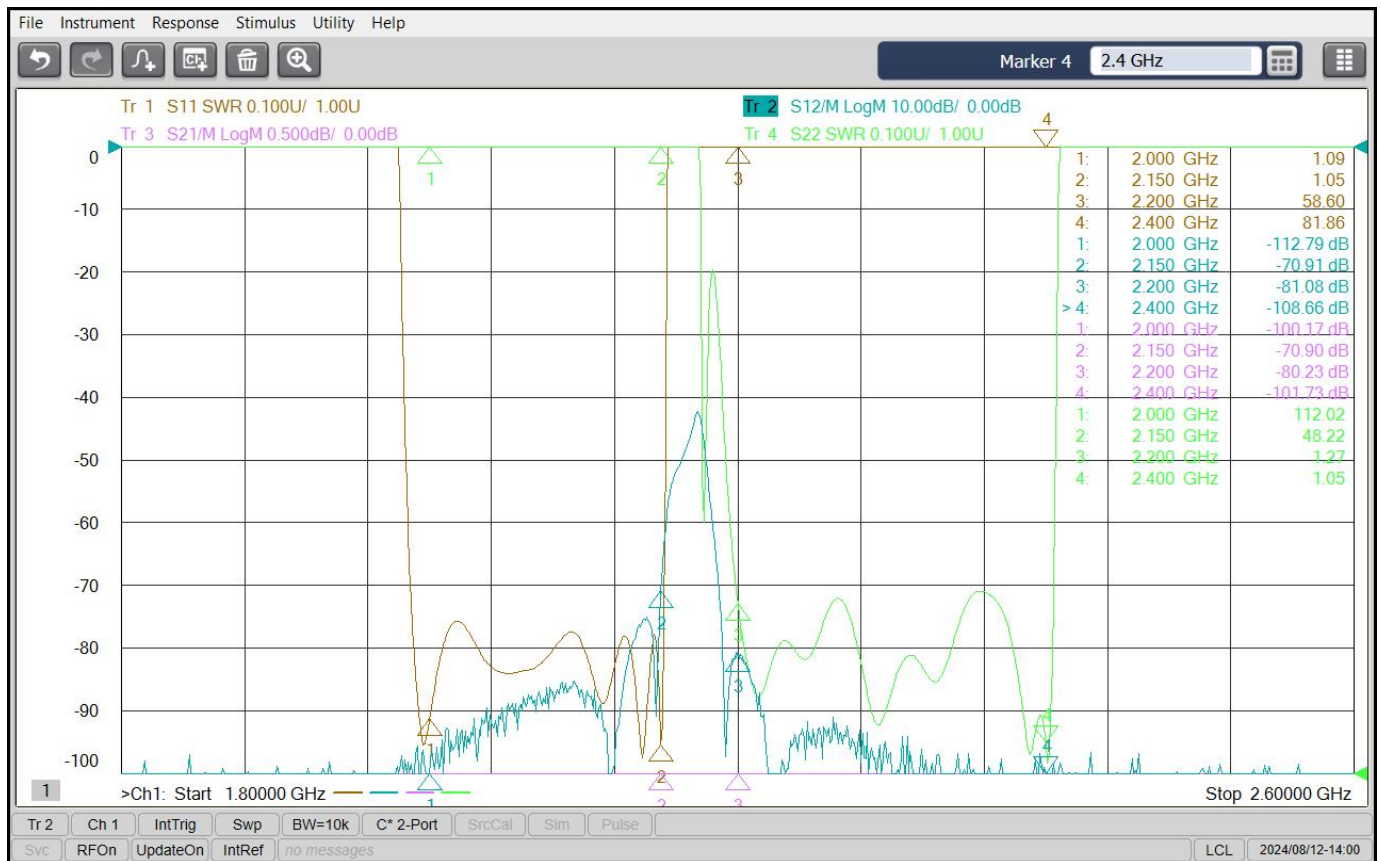

9880-Isolation