


FS3MP20-400-432-S

Triplexer Technical Specifications

Electrical Specifications				
1	Frequency Range	P1	P2	P3
		400~406.4MHz	412.6~419MHz	425.2~431.6MHz
2	Insertion Loss	≤1.8dB		
3	VSWR	≤1.5:1		
4	Isolation	≥60dB@P1&P2&P3		
5	Power	20W Max@Common Port		
Environmental Characteristics				
1	Operating Temperature	-10°C~+65°C		
2	Environmental Class	Indoor		
Mechanical Characteristics				
1	Connectors	SMA-Female		
2	Surface Finishing	Black Paint		
3	Dimensions ¹	220*177*61mm [8.67*6.97*2.4in]		

Outline Drawing

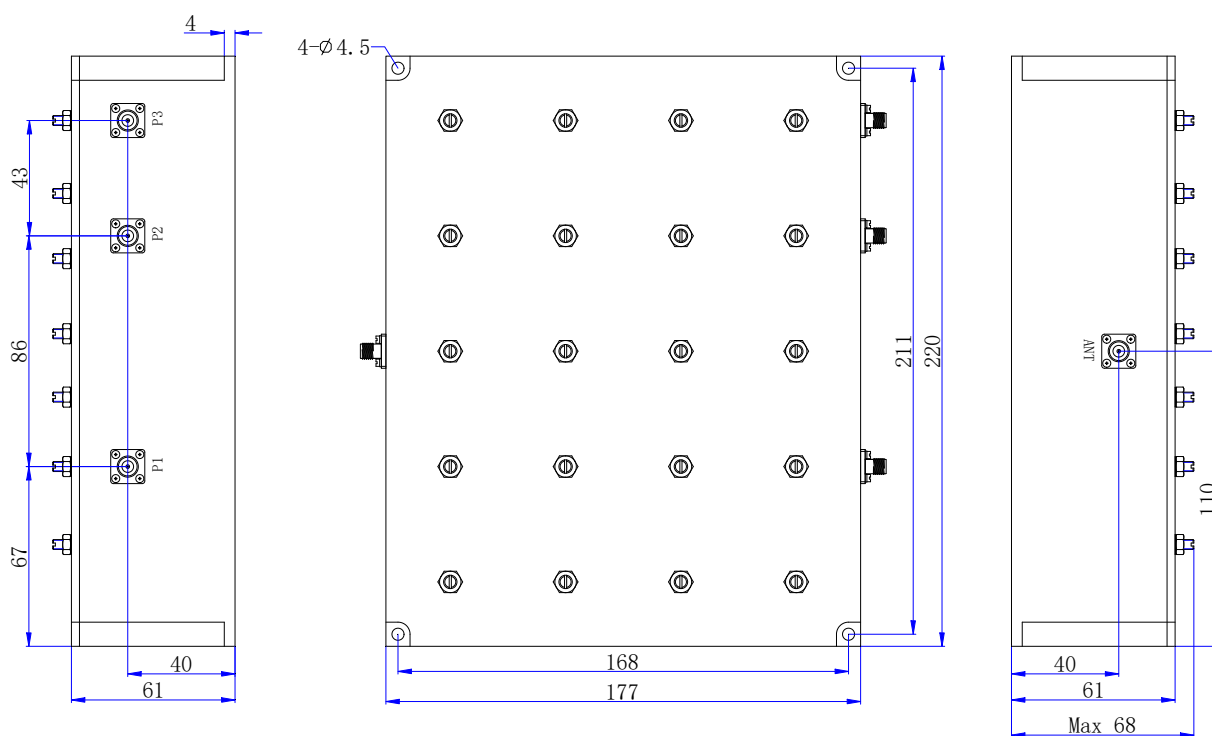

Units: mm/[inch], Tolerance: $\pm 0.5\text{mm}$, Mounting Hole Tolerance: $\pm 0.2\text{mm}$

Note 1: Excluding Connectors

