


FS3MP30-1439-1961-S

Triplexer Specifications

Electrical Specifications				
1	Frequency Range	Port 1	Port 2	Port 3
		1439~1461MHz	1639~1661MHz	1939~1961MHz
2	Insertion Loss	≤1.0dB		
3	VSWR	≤1.3:1		
4	Isolation	≥60dB@Port 1&Port 2&Port 3		
5	Power	30W Max@Common Port		
Environmental Characteristics				
1	Operating Temperature	-20 °C~+65 °C		
2	Environmental Class	Indoor		
Mechanical Characteristics				
1	Connectors	SMA-Female		
2	Surface Finishing	Black Paint		
3	Dimensions ¹	76*62*26mm [2.99*2.44*1.02in]		

Outline Drawing

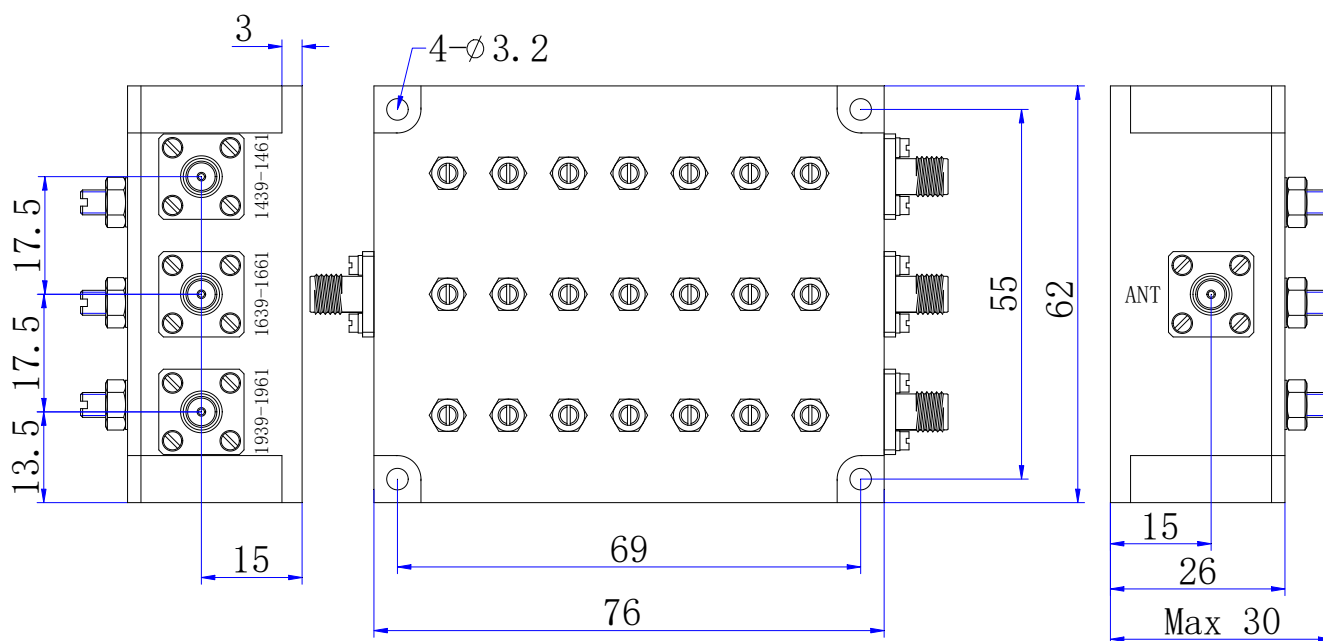

Units: mm/[inch], Tolerance: $\pm 0.5\text{mm}$, Mounting Hole Tolerance: $\pm 0.2\text{mm}$

Note 1: Excluding Connectors

