


FS4MC40-2515-4960-S

Quad-band Combiner Specifications

Electrical Specifications					
1	Frequency Range	2515~2600MHz	2620~2690MHz	3300~3600MHz	4800~4960MHz
2	Insertion Loss	≤1.3dB	≤1.3dB	≤0.8dB	≤0.8dB
3	VSWR	≤1.50:1	≤1.50:1	≤1.50:1	≤1.50:1
4	Rejection	≥65dB@2620-2690MHz ≥85dB@3300-4960MHz	≥65dB@2515~2600MHz ≥85dB@3300~4960MHz	≥85dB@2515-2690MHz ≥85dB@4800-4960MHz	≥85dB@2515-3600MHz
5	Power	40W			
Environmental Characteristics					
1	Operating Temperature	-20°C~+65°C			
2	Environmental Class	Indoor			
Mechanical Characteristics					
1	Connectors	SMA-Female			
2	Surface Finishing	Black Paint			
3	Dimensions ¹	233*168*25mm [9.17*6.61*0.98in]			

Outline Drawing

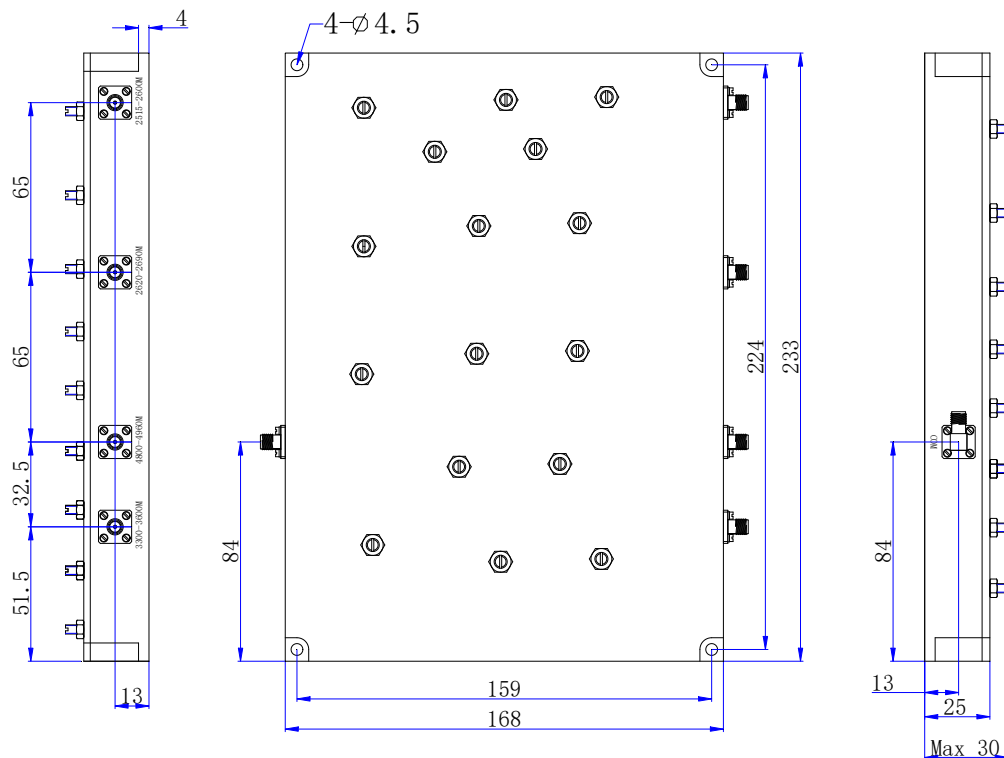

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

