


FSHP-25-200-40-N

High Pass Filter Specifications

Electrical Specifications		
1	Pass Band Frequency	25~200MHz
2	Insertion Loss	≤2.0dB
3	VSWR	≤1.5:1
4	Rejection	≥40dB@DC~20MHz
5	Power Handling	10W
Environmental Characteristics		
1	Operating Temperature	-40°C~+70°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	N-Female/ N-Male
2	Surface Finishing	Silver Plating
3	Dimensions ¹	40*20*20 mm [1.57*0.79*0.79 in]

Outline Drawing

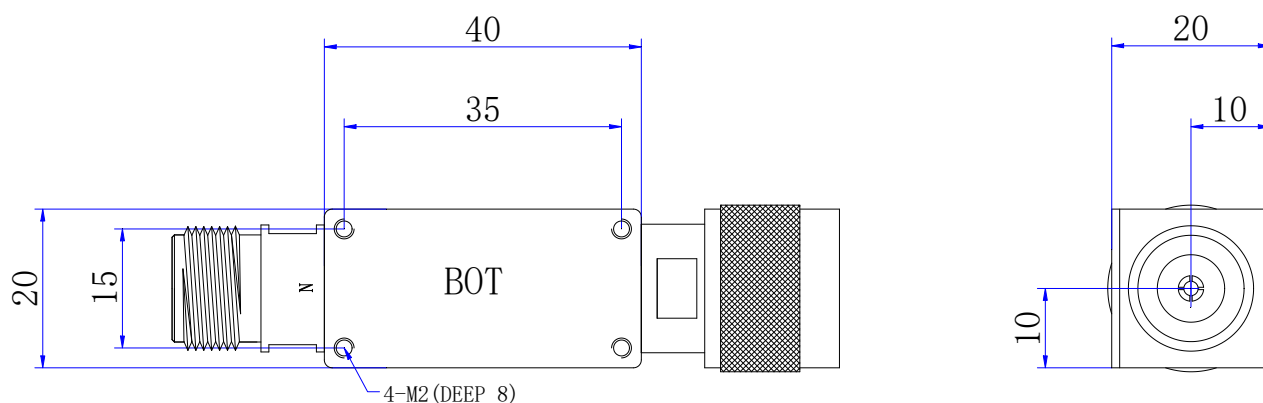

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors