


# FSLP-DC-15-30-N

## Lc Low Pass Filter Specifications

Electrical Specifications		
1	Pass Band Frequency	DC~15MHz
2	Pass Band Insertion Loss	≤1.8dB@9~15MHz ≤0.8dB@12MHz
3	Return Loss	≥15dB
4	Rejection	≥30dB@18~50MHz
5	Power Handling	0.5W CW
Environmental Characteristics		
1	Operating Temperature	-40°C~+70°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female, SMA-Male
2	Surface Finishing	Silver Plating
3	Dimensions <sup>1</sup>	40.4*12*10mm [1.59*0.47*0.39in]

### Outline Drawing

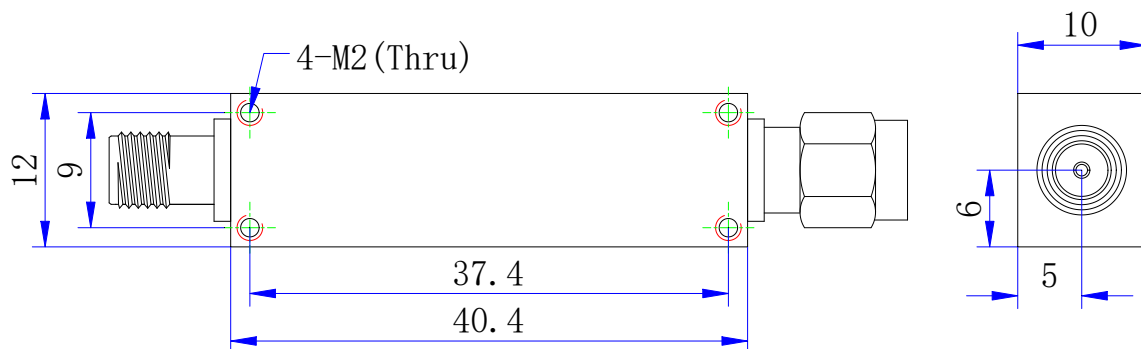

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors