FSLP-DC-150-60-N

Lc Low Pass Filter Specifications

Electrical Specifications		
1	Pass Band Frequency	DC~150MHz
2	Pass Band Insertion Loss	≤1.0dB
3	Return Loss	≥14dB
4	Rejection	≥60dB@300~800MHz
5	Power	2W CW
Environmental Characteristics		
1	Operating Temperature	-55℃~+85℃
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	N-Female, N-male
2	Surface Finishing	Silver Plating
3	Dimensions[1]	40*20*20mm [1.57*0.79*0.79 in]

Outline Drawing

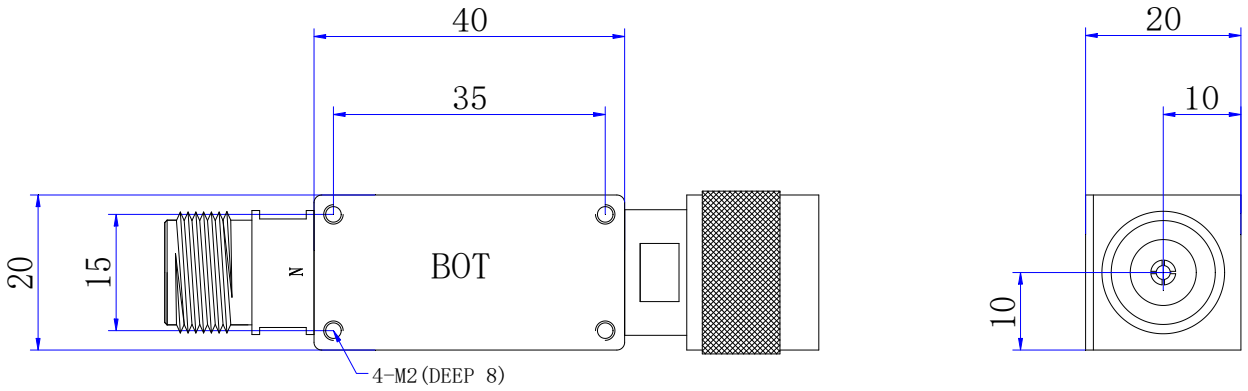

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

Fasnwave Inc. www.fasnwave.com E-Mail:sales@fasnwave.com