


FSLP-DC-400-30-S

Lc Low Pass Filter Specifications

Electrical Specifications		
1	Pass Band Frequency	DC~400MHz
2	Insertion Loss	≤1.8dB
3	VSWR	≤1.50:1
4	Rejection	≥30dB@450~1000MHz
5	Power Handling	1W
Environmental Characteristics		
1	Operating Temperature	-30°C~+70°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	40.4*12*10mm [1.59*0.47*0.39 in]

Outline Drawing

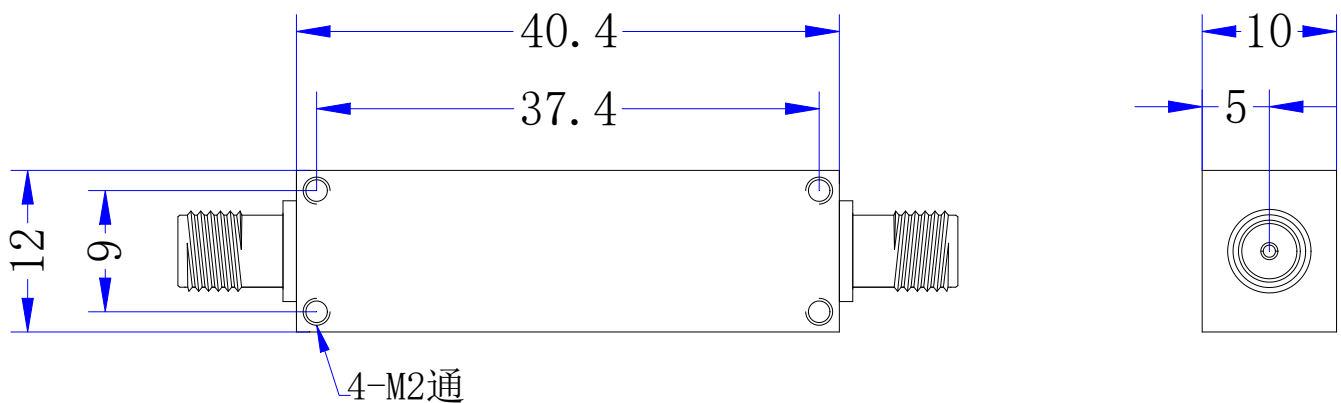

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors