


FSLP-DC-5-30-S

Lc Low Pass Filter Specifications

Electrical Specifications		
1	Pass Band Frequency	DC~5MHz
3	Pass Band Insertion Loss	≤1.0dB
3	VSWR	≤1.5:1
4	Rejection	≥30dB@10~100MHz
5	Power	5W
6	Impedance	50 Ω
Environmental Characteristics		
1	Operating Temperature	-55℃~+85℃
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA- Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	40.4*12*10mm [1.59*0.47*0.39in]

Outline Drawing

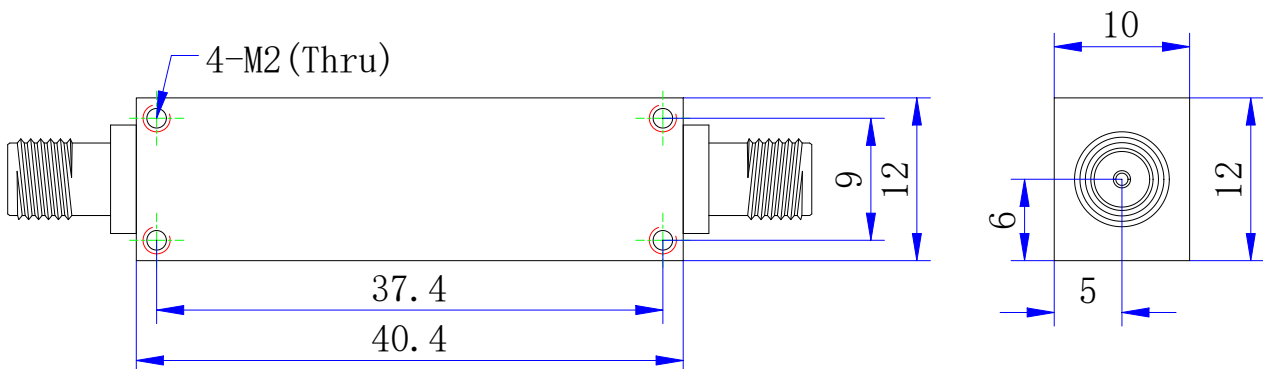

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors