


FSMX2-4400-7400-S

Diplexer Specifications

Electrical Specifications			
1	Frequency Range	4800	6700
		4400~5200MHz	6000~7400MHz
2	Insertion Loss	≤0.7dB	≤0.7dB
3	VSWR	≤1.50:1	≤1.50:1
4	Rejection	≥60dB@6000~7400MHz	≥40dB@4400~5200MHz
5	Power	25W	25W
Environmental Characteristics			
1	Operating Temperature	-20°C~+60°C	
2	Environmental Class	Indoor	
Mechanical Characteristics			
1	Connectors	SMA-Female	
2	Surface Finishing	Black Paint	
3	Dimensions ¹	80*36*15mm [3.15*1.42*0.59in]	

Outline Drawing

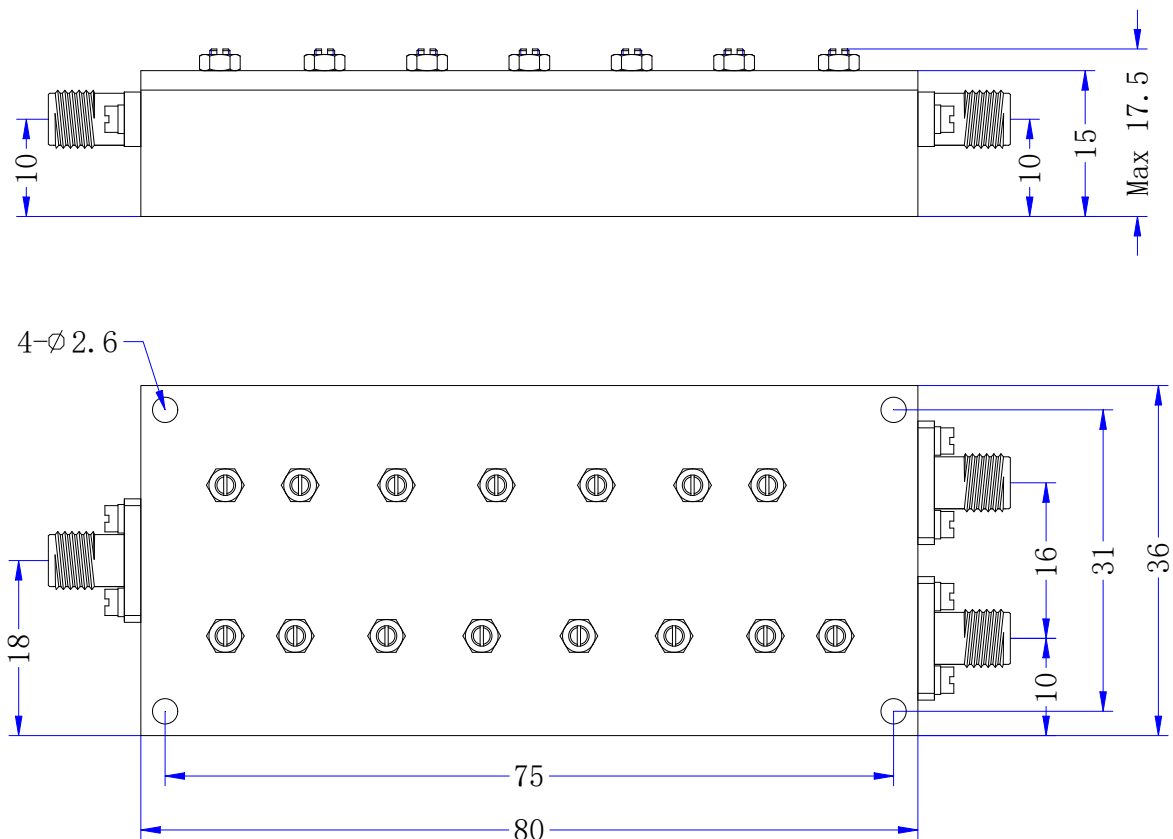

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

