


FS2MC300-2475-2501-N

Dual-band Combiner Specifications

Electrical Specifications			
1	Frequency Range	Port 1	Port 2
		2475~2485MHz	2499~2501MHz
2	Insertion Loss	≤2.0dB	≤2.0dB
3	VSWR	≤1.5:1	≤1.5:1
4	Rejection	≥65dB @ DC~2350MHz	≥65dB @ 2620~4000MHz
5	Isolation	≥60dB (Typical Value 65dB)@ 2475~2485MHz,2499~2501MHz	
6	Power	300W@Common Port	
Environmental Characteristics			
1	Operating Temperature	-20°C~+60°C	
2	Environmental Class	Indoor	
Mechanical Characteristics			
1	Connectors	N-Female	
2	Surface Finishing	Black Paint	
3	Dimensions ¹	194*80*23.5mm [7.64*3.15*0.93in]	

Outline Drawing

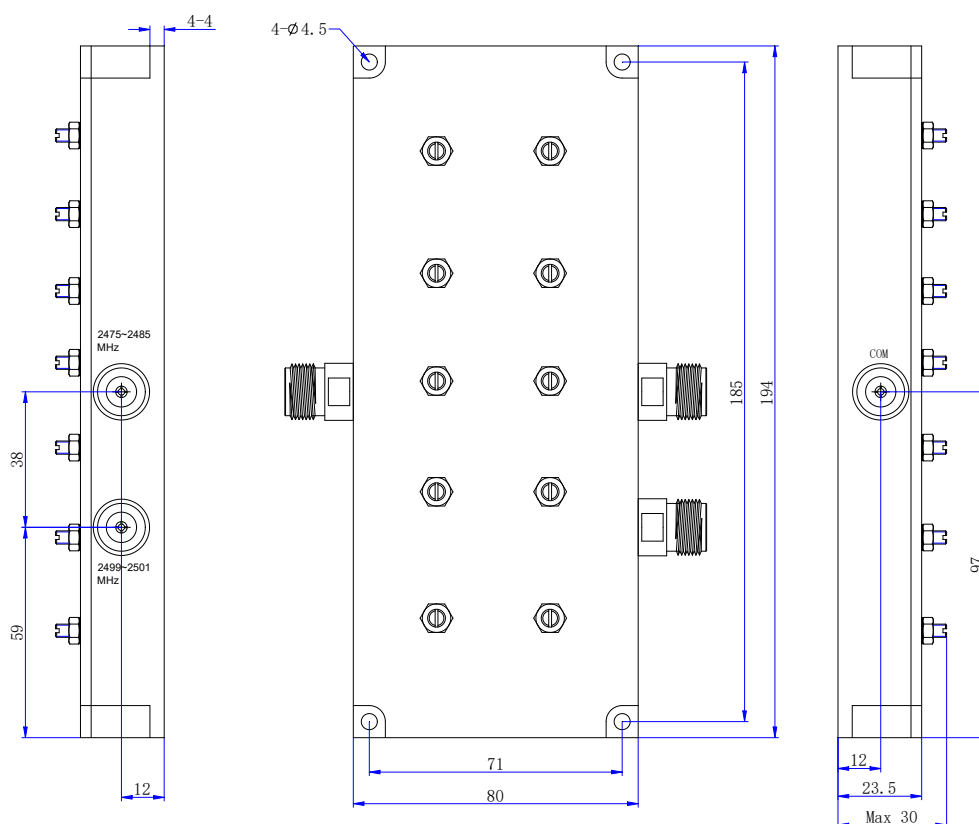

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

