


FS3BP10-4800-5000-S

Triple Pass Band Filter Specifications

Electrical Performance Specifications				
1	Center Frequency	T12	T10	T11
2	Pass band Frequency	4800~4900MHz	4900~4960MHz	4960~5000MHz
3	Pass band Insertion Loss	≤1.5dB	≤1.5dB	≤1.5dB
4	VSWR	≤1.30:1	≤1.30:1	≤1.30:1
5	Rejection	≥40dB@DC-4750MHz ≥40dB@4950-8000MHz	≥40dB@DC-4850MHz ≥40dB@5010-8000MHz	≥40dB@DC-4910MHz ≥40dB@5050-8000MHz
6	Power	10W		
Environmental Characteristics				
1	Temperature	-20 °C to +65 °C		
2	Environmental Class	Indoor		
Mechanical Structural Characteristics				
1	Connectors	SMA-Female		
2	Surface Finishing	Black Paint		
3	Dimensions ¹	95*50*16mm [3.74*1.97*0.63in]		

Outline Drawing

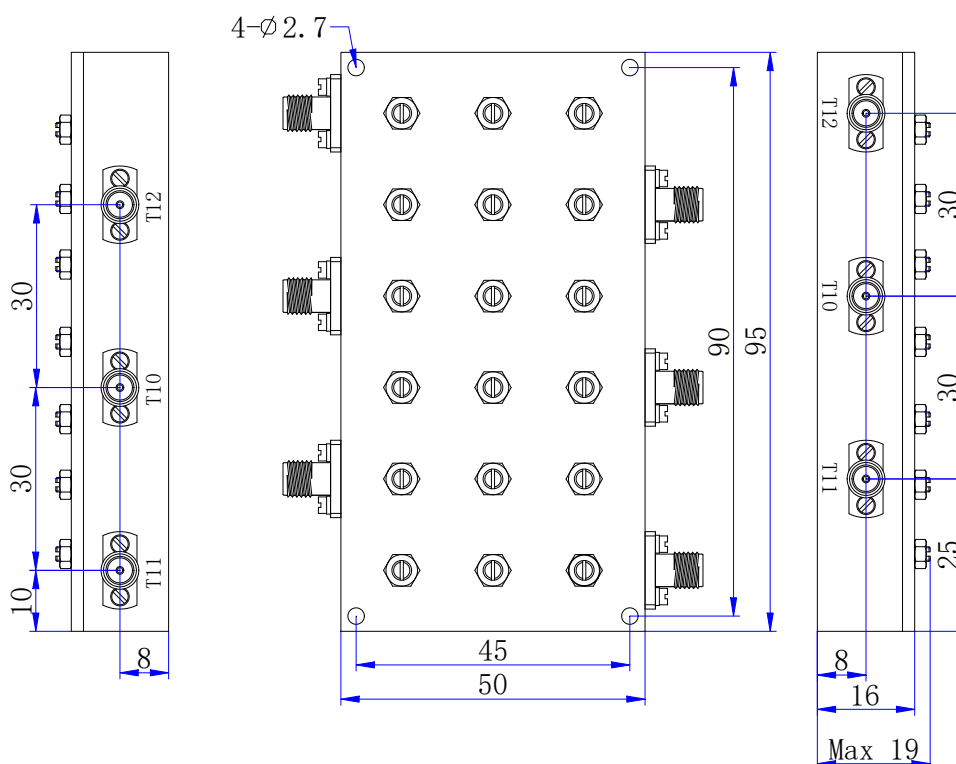

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

