


FS3MC20-703-2690-S

Triple-band Combiner Specifications

Electrical Specifications				
1	Frequency Range	N28		N41
		703~748MHz	758~803MHz	2496~2690MHz
2	Insertion Loss	≤1.5dB		≤1.0dB
3	VSWR	≤1.50:1		
4	Rejection	≥60dB@703~748MHz & 758~803MHz ≥80dB@2496~2690MHz		
5	Power	Each Channel:20W		
Environmental Characteristics				
1	Operating Temperature	-20°C~+65°C		
2	Environmental Class	Indoor		
Mechanical Characteristics				
1	Connectors	SMA-Female		
2	Surface Finishing	Black Paint		
3	Dimensions ¹	143*136*51mm [5.63*5.35*2.0in]		

Outline Drawing

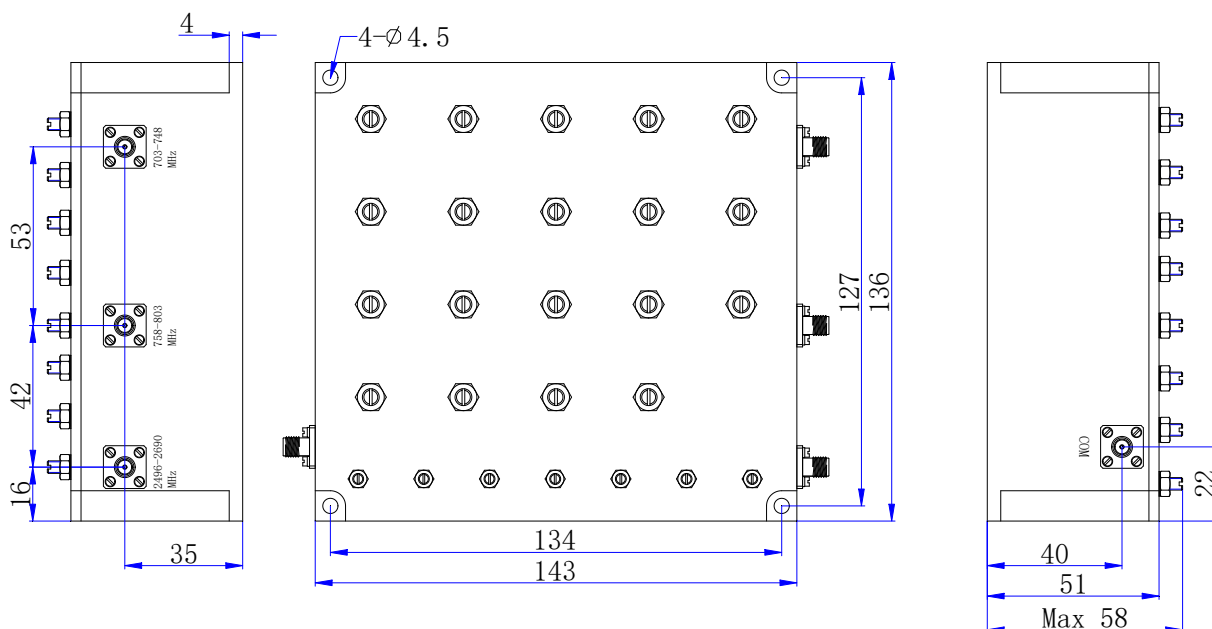

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

