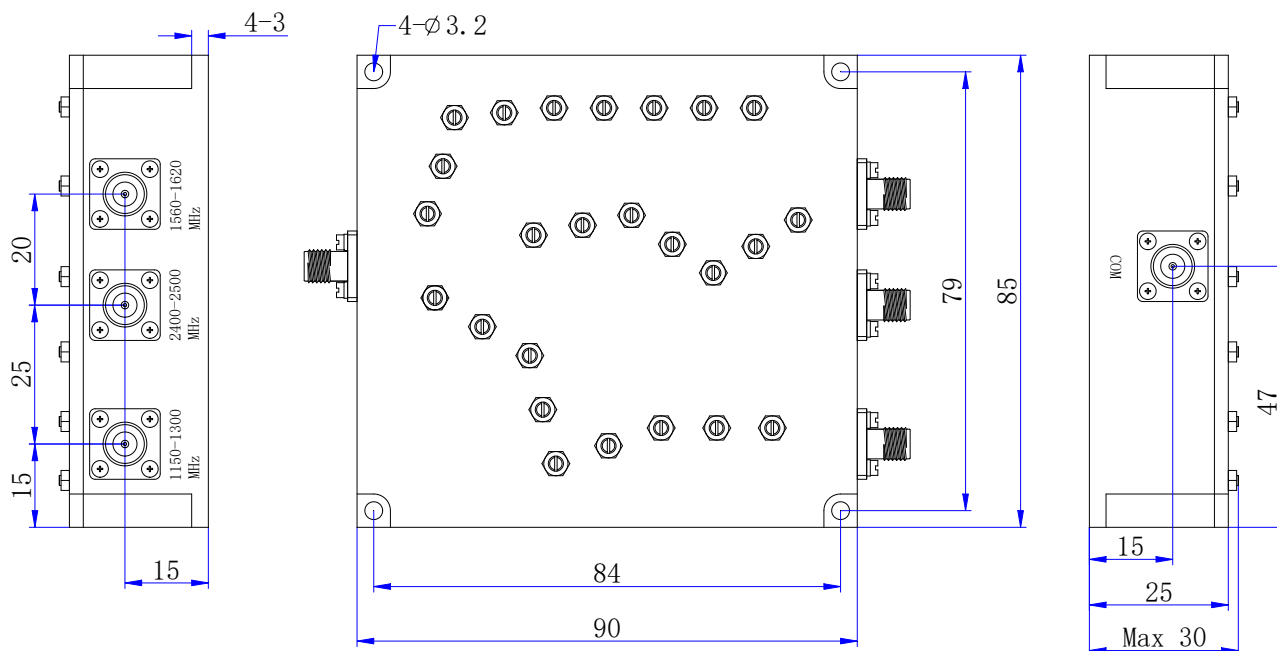


FS3MC40-1150-2500-S

Triple-band Combiner Specifications

Electrical Specifications				
1	Frequency Range	1150~1300MHz	1560~1620MHz	2400~2500MHz
2	Insertion Loss	≤1.5dB		
3	VSWR	≤1.50:1		
4	Rejection	≥70dB@1170~1280MHz,1550~1620MHz,2400~2500MHz,5150~5850MHz		
5	Power	40W		
Environmental Characteristics				
1	Operating Temperature	-10 °C to +60 °C		
2	Environmental Class	Indoor		
Mechanical Characteristics				
1	Connectors	SMA-Female		
2	Surface Finishing	Black Paint		
3	Dimensions ¹	90*85*25mm [3.54*3.35*0.98in]		

Outline Drawing


Units: mm/[inch], Tolerance: $\pm 0.5\text{mm}$, Mounting Hole Tolerance: $\pm 0.2\text{mm}$

Note 1: Excluding Connectors

