


FS3PD2-0-6000-S

3-Way Resistive Power Divider, DC-6000MHz, SMA(f)

Electrical Specifications		
1	Frequency Range	DC~6000MHz
2	Insertion Loss	≤6.0 dB(Excluding theoretical loss 4.8dB)
3	Input Port VSWR	≤1.4:1
4	Output Port VSWR	≤1.4:1
5	Isolation	≥9dB
6	Amplitude Balance	≤±0.4dB
7	Phase Balance	≤±4°
8	Power	Forward Power 2W
9	Impedance	50Ω
Environmental Specifications		
1	Operating Temperature	-35°C~+75°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	45*34*12.5mm[1.77*1.34*0.49in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

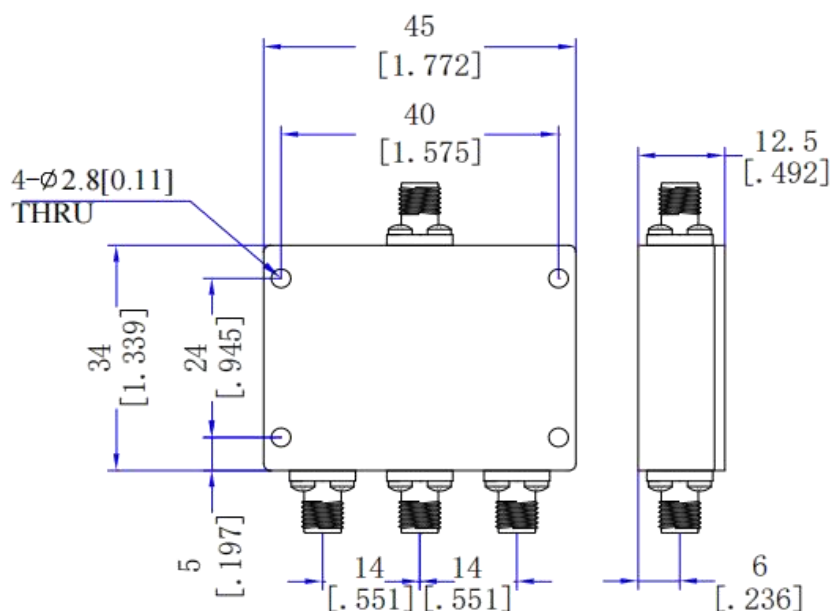

Note 1: Excluding Connectors