


FSBP10-10200-11000-S

Cavity Band Pass Filter Specifications

Electrical Specifications		
1	Center Frequency	10600MHz (BW 800MHz)
2	Pass Band Frequency	10200~11000MHz
3	Pass Band Insertion Loss	≤0.5dB
4	VSWR	≤1.30:1
5	Rejection	≥60dB@DC~9000MHz ≥30dB@9000~9800MHz ≥30dB@11400~12200MHz ≥60dB@12500~15000MHz
6	Power	10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +60°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	60*32*10.5mm [2.36*1.3*0.41in]

Outline Drawing

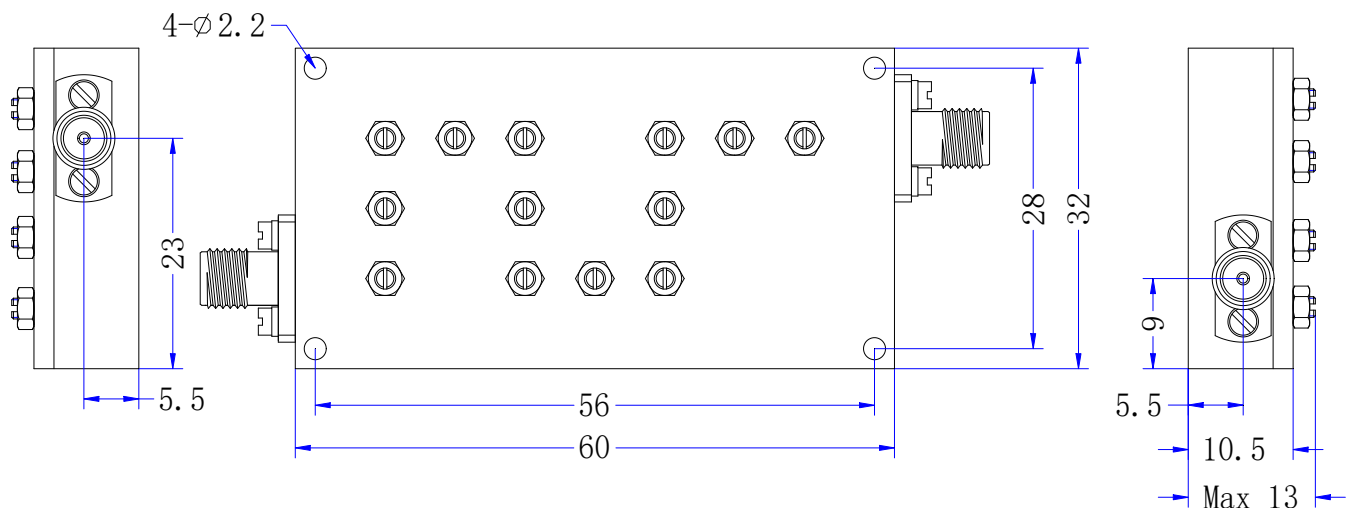

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

