


FSBP10-12750-13250-P05

Cavity Band Pass Filter Specifications


Electrical Specifications		
1	Center Frequency	13000MHz
2	Pass Band Frequency	12750~13250MHz
3	Pass Band Insertion Loss	≤1.6dB
4	VSWR	≤1.50:1
5	Rejection	≥50dB@DC~12300MHz ≥70dB@14650~16650MHz
6	Power	10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +60 °C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	Ø0.5×2 mm microstrip pin
2	Surface Finishing	Silver Plating
3	Dimensions ¹	37*21*6.5mm [1.46*0.83*0.26in]

Outline Drawing

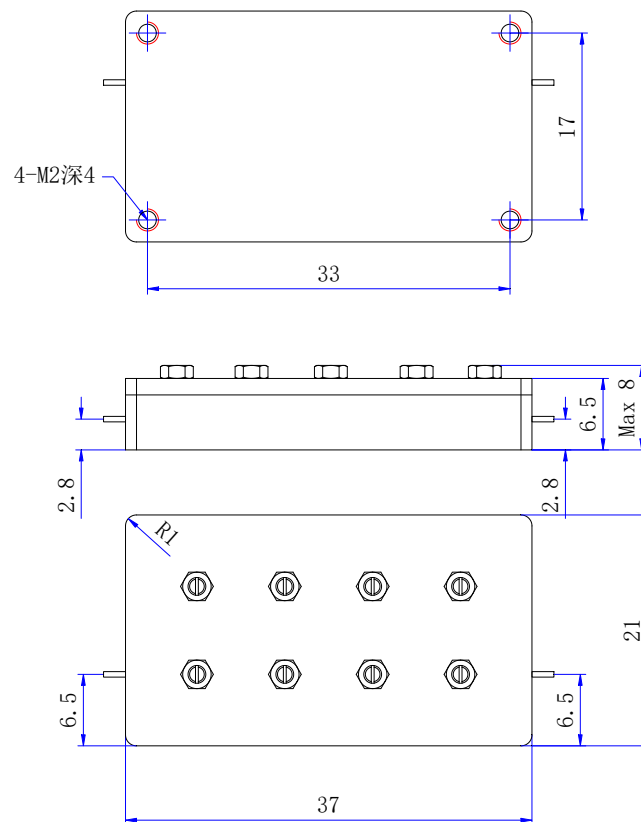


Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm


Note 1: Excluding Connectors

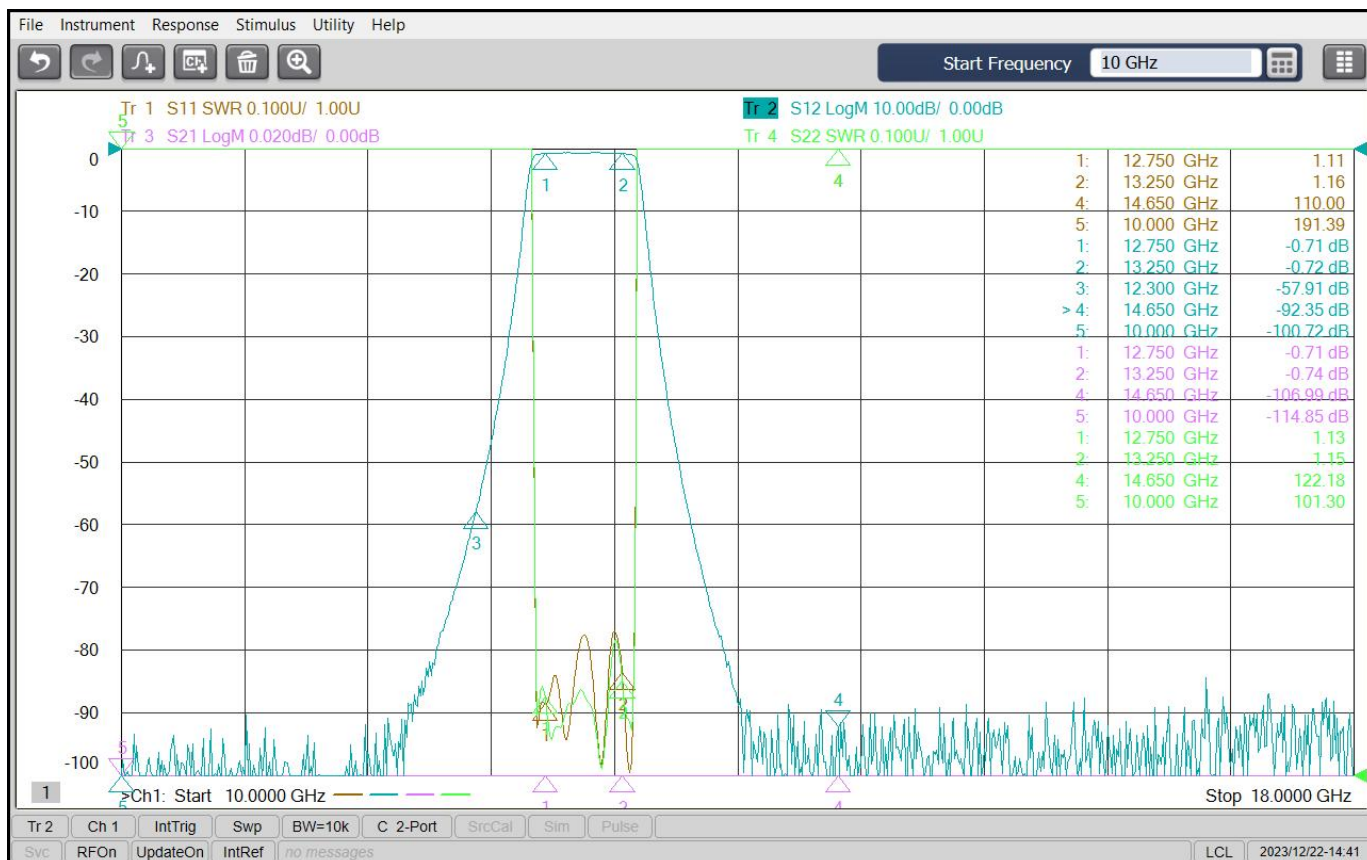

Room temperature

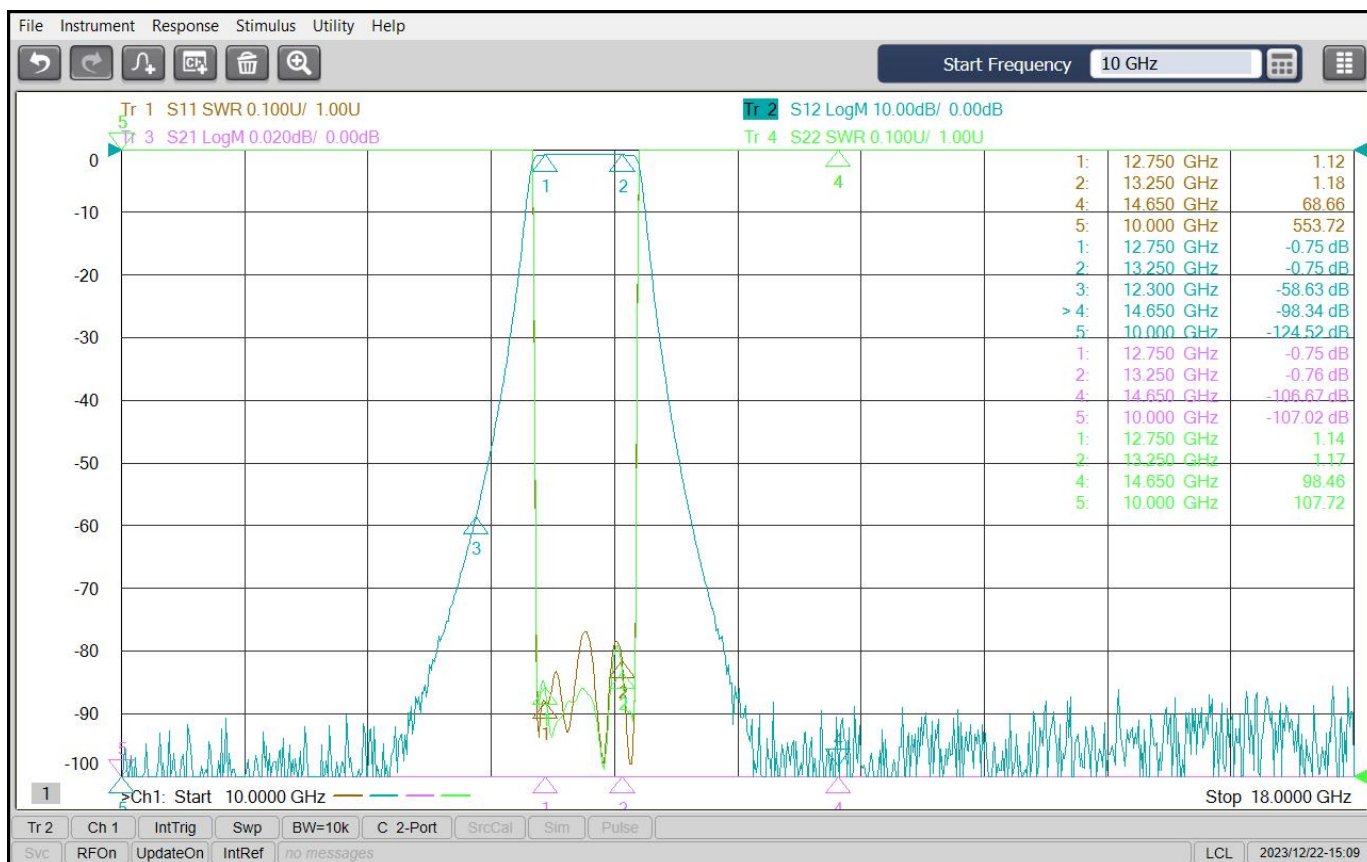

Low temperature

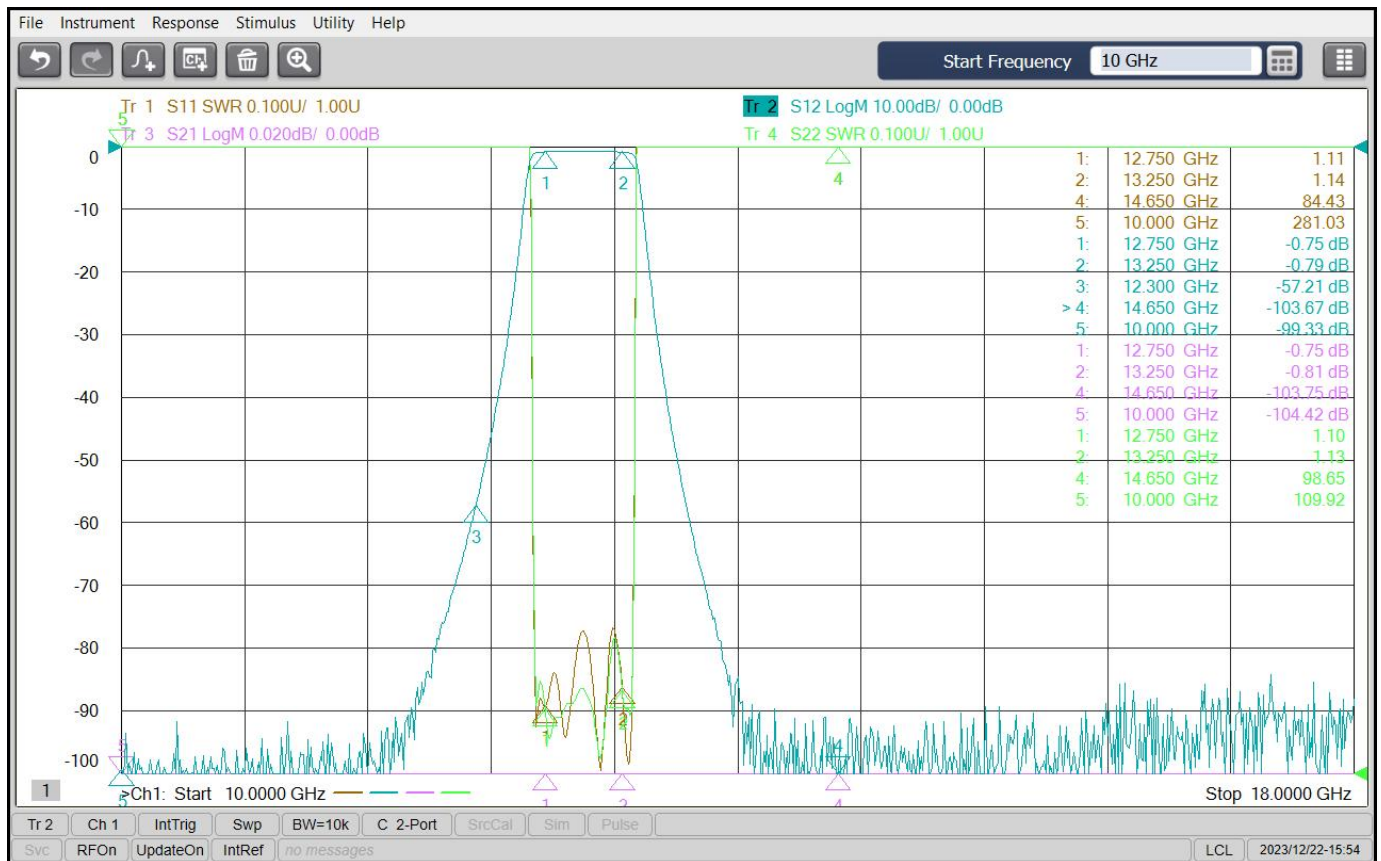

High temperature