


FSBP10-1390-1510-S

Cavity Filter Specifications

Electrical Specifications		
1	Pass band Frequency	1390~1510MHz
2	Pass band Insertion Loss	≤1.0dB
3	In-band Fluctuation	≤0.7dB
4	VSWR	≤1.50:1
5	Rejection	≥80dB@DC-1340MHz ≥80dB@1560-2500MHz
6	Power	10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +65 °C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Surface Spray-Painted with Black Paint
3	Dimensions ¹	67*67*22mm [2.64*2.64*0.87in]

Outline Drawing

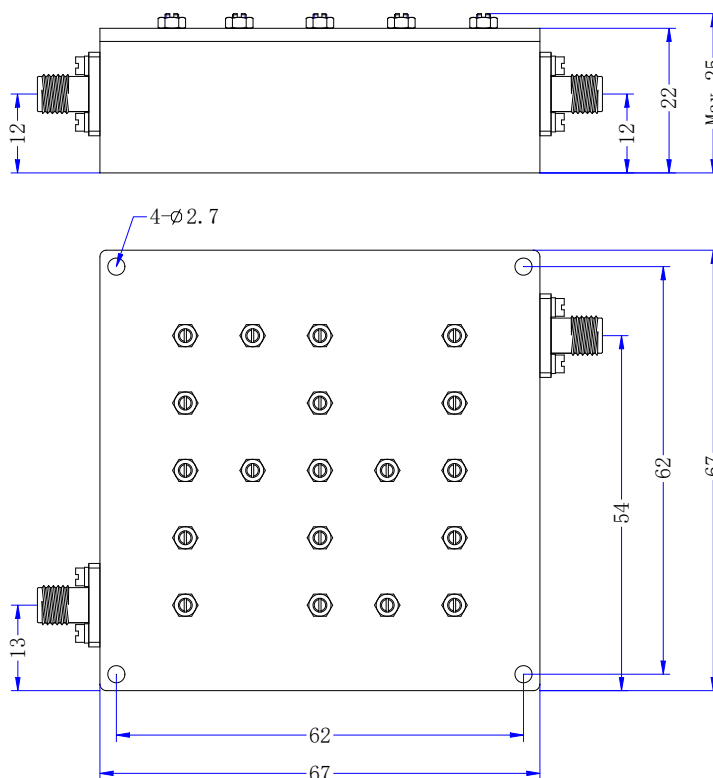

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

