


FSBP10-2110-2170-S

Cavity Band Pass Filter Specifications

Electrical Specifications		
1	Center Frequency	2140MHz
2	Pass Band Frequency	2110~2170MHz
3	Pass Band Insertion Loss	≤2.0dB
4	VSWR	≤1.3:1
5	Rejection	≥25dB@DC~2095MHz ≥25dB@2185-3000MHz
6	Power	Average Power: 10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +60 °C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	83*36*17mm [3.27*1.42*0.67in]

Outline Drawing

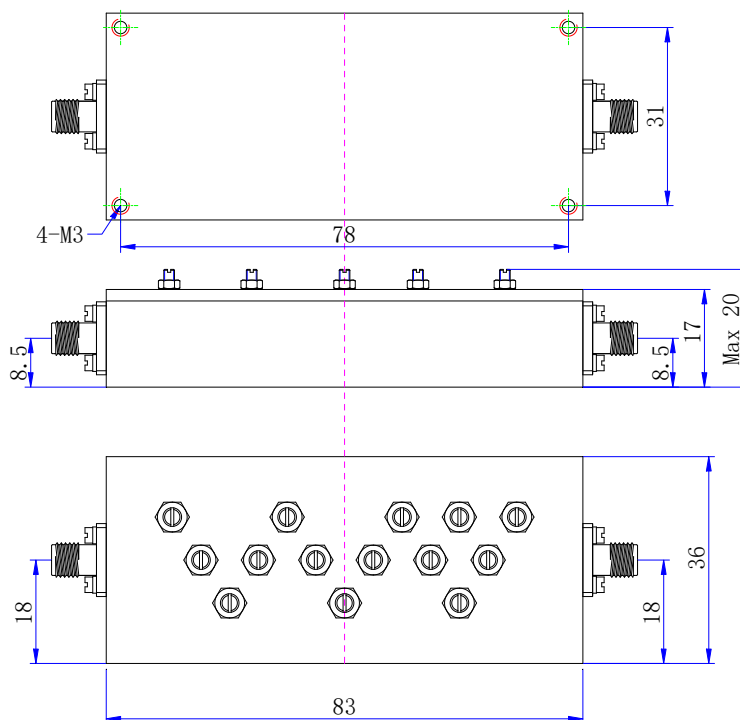

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

