


FSBP10-5400-5900-S

Cavity Band Pass Filter Specifications

Electrical Specifications		
1	Center Frequency	5650MHz (BW 500MHz)
2	Pass Band Frequency	5400~5900MHz
3	Pass Band Insertion Loss	≤1.0dB
4	VSWR	≤1.30:1
5	Rejection	≥60dB@DC~4900MHz ≥30dB@4900~5100MHz ≥30dB@6100~6300MHz ≥60dB@6300~16500MHz
6	Power	10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +60°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	113*20*11mm [4.45*0.79*0.43in]

Outline Drawing

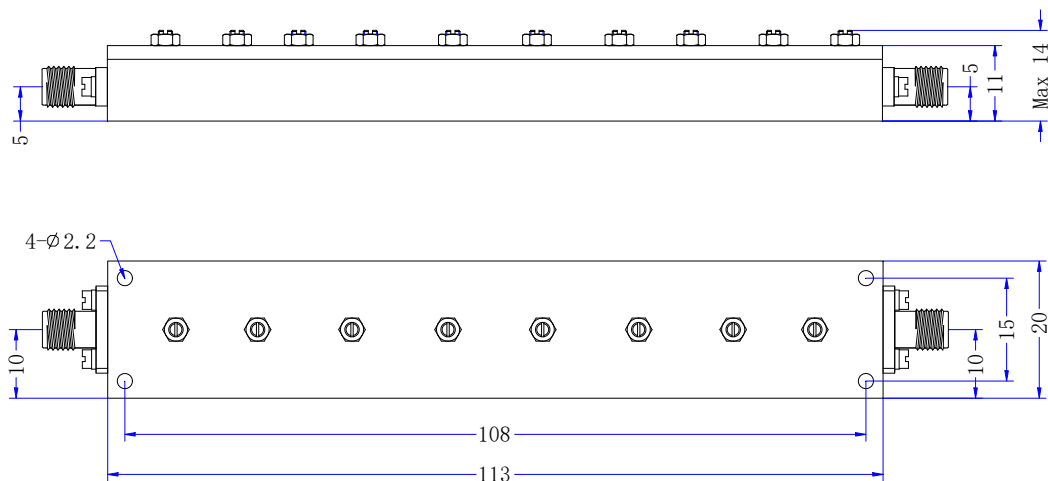

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

