


FSBP10-5600-5700-S

Cavity Band Pass Filter Specifications

Electrical Specifications		
1	Center Frequency	5650GHz (BW 100MHz)
2	Pass Band Frequency	5600~5700MHz
3	Pass Band Insertion Loss	≤1.5dB
4	VSWR	≤1.30:1
5	Rejection	≥60dB@DC~5300MHz ≥30dB@5300~5500MHz ≥30dB@5800~6000MHz ≥60dB@6000~16500MHz
6	Power	10W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +60°C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Silver Plating
3	Dimensions ¹	90*20*11mm [3.54*0.79*0.43in]

Outline Drawing

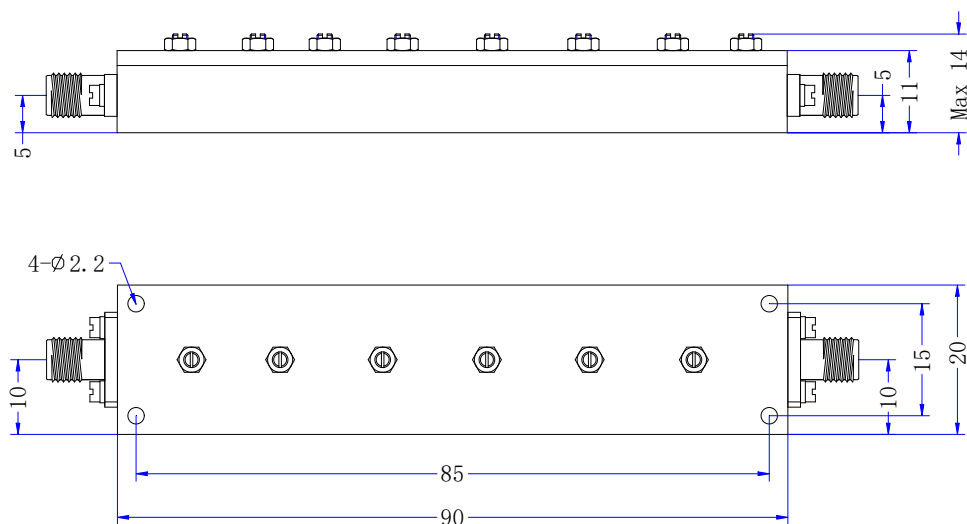

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

