


FSBP20-5250-6000-S

Cavity Band pass Filter Specifications

Electrical Specifications		
1	Center Frequency	5625MHz
2	Pass Band Frequency	5250~6000MHz
3	Pass Band Insertion Loss	≤0.7dB
4	VSWR	≤1.40:1
5	Rejection	≥40dB@2800~3600MHz ≥40dB@8500~10500MHz
6	Power	20W
Environmental Characteristics		
1	Operating Temperature	-20 °C to +65 °C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Blue Paint
3	Dimensions ¹	70*19*13mm [2.76*0.75*0.51in]

Outline Drawing

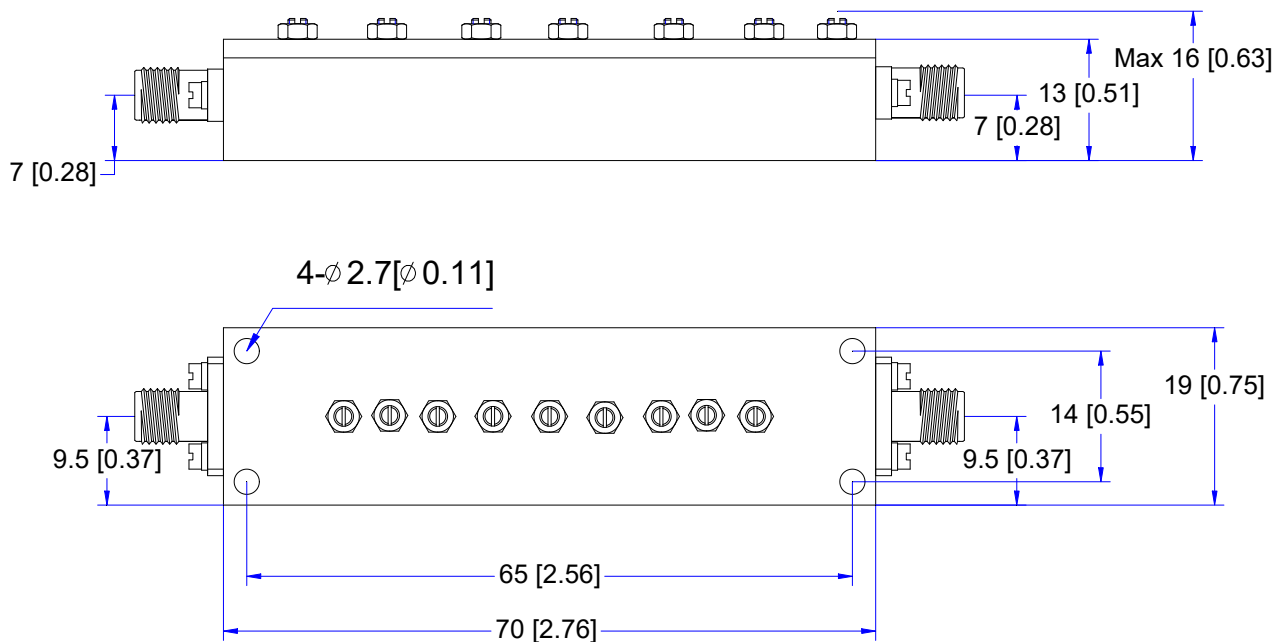

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

