


FSBP60-5200-5600-S

Cavity Band Pass Filter Specifications

Electrical Specifications		
1	Center Frequency	5400MHz (BW 400MHz)
2	Pass Band Frequency	5200~5600MHz
3	Pass Band Insertion Loss	≤1.2dB
4	Return loss	≥18dB
5	Rejection	≥60dB@DC~4900MHz ≥60dB@5900~8000MHz
6	Power	60W
Environmental Characteristics		
1	Operating Temperature	-40 °C to +70°C
2	Storage Temperature	-55 °C to +85 °C
2	Environmental Class	Indoor
Mechanical Characteristics		
1	Connectors	SMA-Female
2	Surface Finishing	Natural Conductive Oxidizing
3	Dimensions ¹	151.5*21.5*19mm [5.97*0.85*0.75in]

Outline Drawing

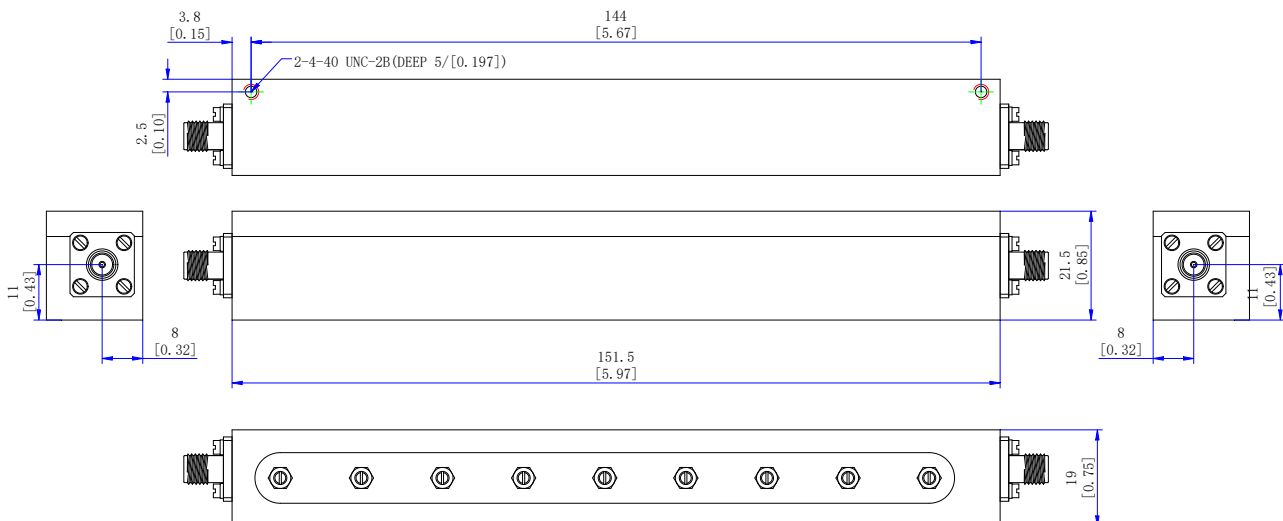

Units: mm/[inch], Tolerance: ±0.5mm, Mounting Hole Tolerance: ±0.2mm

Note 1: Excluding Connectors

