


FSBP5-17700-21200-S

Cavity Band Pass Filter, 17700~21200MHz, 5W, SMA(f)

Electrical Specifications		
1	Center Frequency(F0)	19450 MHz
2	Pass Band Frequency	17700~21200 MHz
3	Insertion Loss	≤0.7 dB
4	Pass Band Ripple	≤0.3 dB
5	Return Loss	≥20 dB
6	Rejection	≥80 dB@ DC~15100 MHz ≥50 dB@15100~16000 MHz ≥55 dB@22850~23350 MHz ≥80 dB@23350~35000 MHz
7	Impedance	50Ω
8	Power Handling	5W Max
Environmental Specifications		
1	Operating Temperature	-30°C~+70°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	60*16*9.5 mm [2.36*0.63*0.37 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

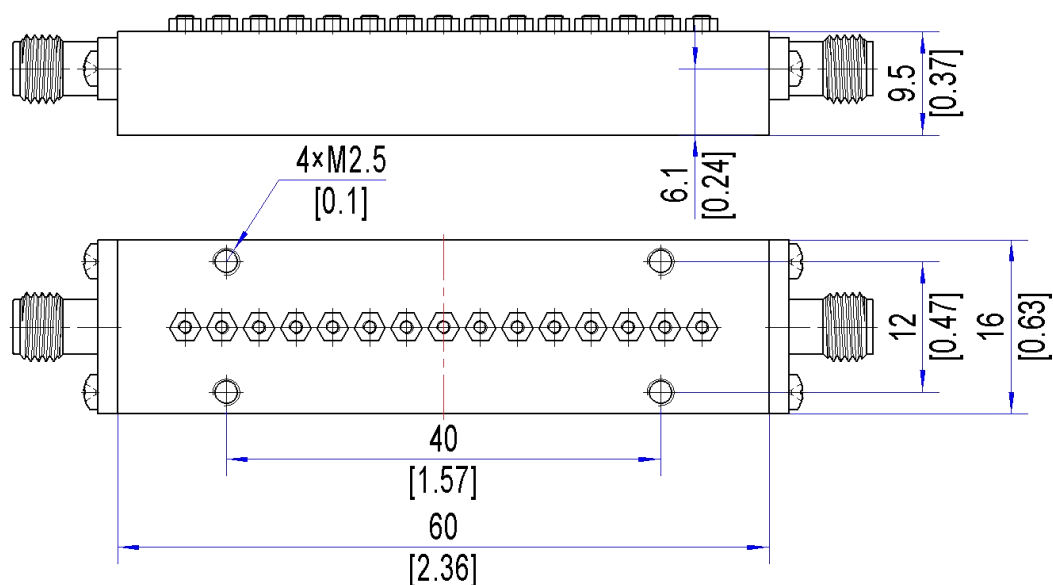

Note 1: Excluding Connector size

