


FSBP5-26000-40000-K

Comb Band Pass Filter, 26000~40000MHz, 5W, 2.92mm(f)

Electrical Specifications		
1	Center Frequency	33000MHz
2	Pass Band Frequency	26000~40000MHz
3	Pass Band Insertion Loss	≤1.1dB
4	Pass Band Ripple	≤0.5dB
5	VSWR	≤1.29:1
6	Rejection	≥80dB@DC~24000MHz ≥50dB@24000~25000MHz ≥35dB@41000~42300MHz ≥80dB@42300~43000MHz ≥40dB@43000~47000MHz
7	Power	5W Max.
Environmental Characteristics		
1	Operating Temperature	-30°C~+70°C
Mechanical Characteristics		
1	Connectors	2.92mm-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	70*16*9mm [2.76*0.63*0.35in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

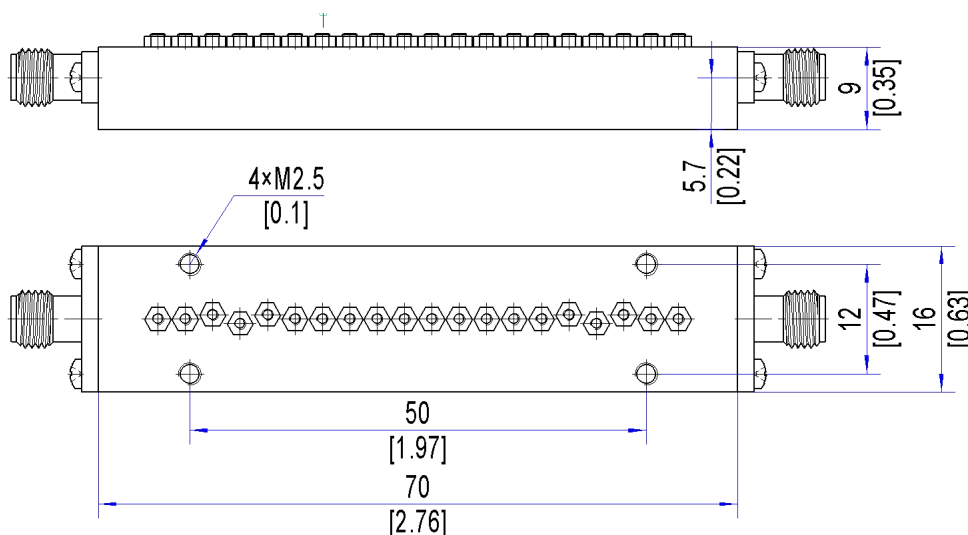

Note 1: Excluding Connectors