


FSBR1-607-708-S

LC Cavity Band Rejection Filter,607~708MHz,1W,SMA(f)

Electrical Specifications		
1	Stop Band Frequency	607~708 MHz
2	Stop Band Attenuation	≥40 dB
3	Pass Band Frequency	DC~540 MHz , 820~1500 MHz
4	Insertion Loss	≤2.0 dB
5	VSWR	≤1.8:1
6	Impedance	50Ω
7	Power Handling	1 W Max
Environmental Specifications		
1	Operating Temperature	-30°C~+70°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	30*18*13 mm [1.18*0.71*0.51 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

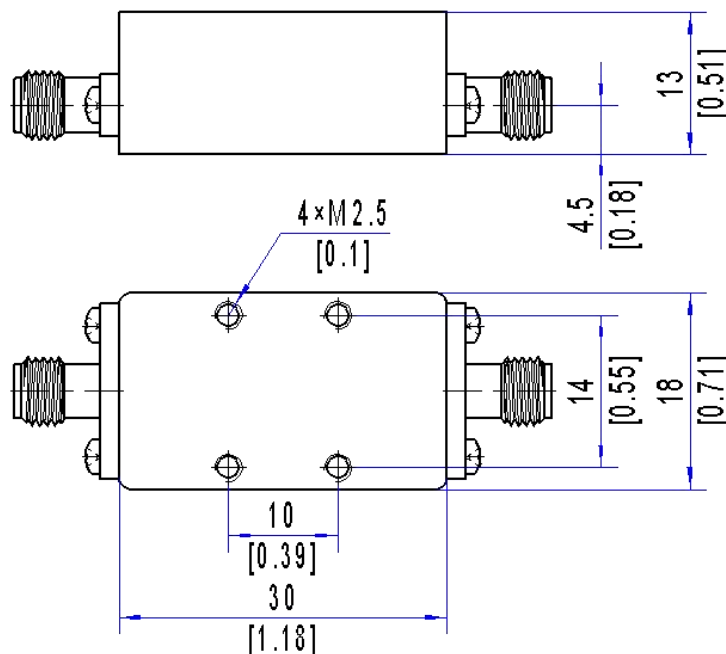

Note 1: Excluding Connector size

