


FSBR10-2200-2600-S

Cavity Band Rejection Filter,2200~2600MHz,10W,SMA(f)

Electrical Specifications		
1	Stop Band Frequency	2200~2600 MHz
2	Stop Band Attenuation	≥50 dB
3	Pass Band Frequency	DC~2080MHz,2720~6000MHz
4	Insertion Loss	≤1.0 dB
5	VSWR	≤1.5:1@750~2080MHz,2720~5500MHz ≤1.8:1@DC~750MHz,5500~6000MHz
6	Impedance	50Ω
7	Power Handling	10W Max.
Environmental Specifications		
1	Operating Temperature	-10°C~+50°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	209*34*22 mm [8.23*1.34*0.87 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

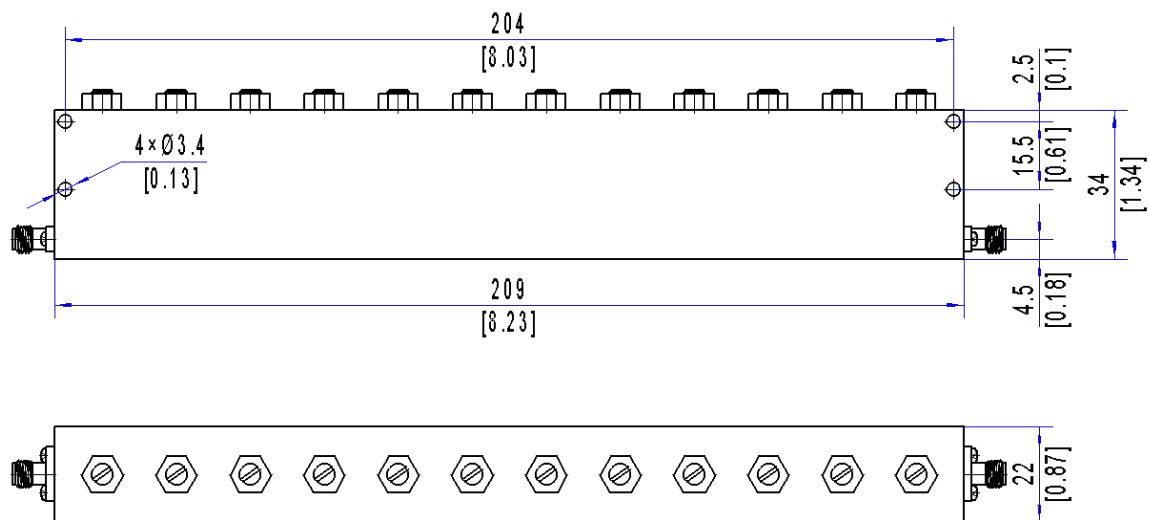

Note 1: Excluding Connector size