


FSBR20-1550-1610-S

Cavity Band Rejection Filter, 1550~1610MHz, 20W, SMA(m)

Electrical Specifications		
1	Stop Band Frequency	1550~1610 MHz
2	Stop Band Attenuation	≥50 dB
3	Pass Band Frequency	DC~1520 MHz , 1640~4300 MHz
4	Insertion Loss	≤1.5 dB
5	VSWR	≤1.5:1
6	Impedance	50Ω
7	Power Handling	20W Max
Environmental Specifications		
1	Operating Temperature	-10°C~+50°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	245*50*22 mm [9.65*1.97*0.87 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

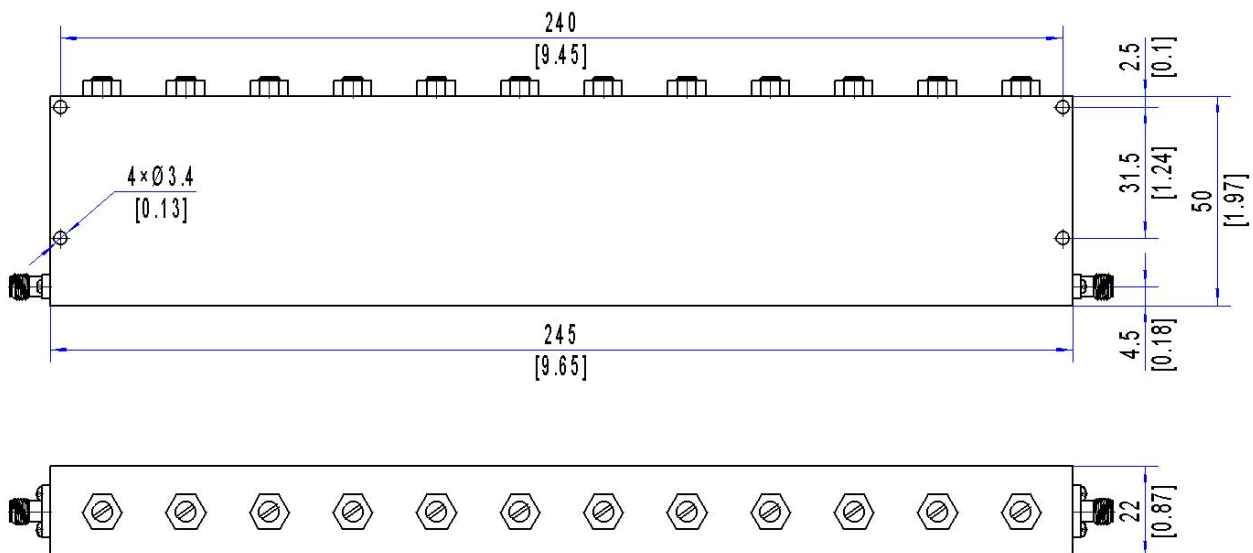

Note 1: Excluding Connector size

