


FSBR20-1920-2010-S

Cavity Band Rejection Filter,1920~2010MHz,20W,SMA(f)

Electrical Specifications		
1	Stop Band Frequency	1920~2010 MHz
2	Stop Band Attenuation	≥40 dB
3	Pass Band Frequency	DC~1895MHz , 2035~5000MHz
4	Insertion Loss	≤2.0 dB
5	VSWR	≤1.7:1
6	Impedance	50Ω
7	Power Handling	20W Max.
Environmental Specifications		
1	Operating Temperature	-10°C~+50°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	245*47*22 mm [9.65*1.85*0.87 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

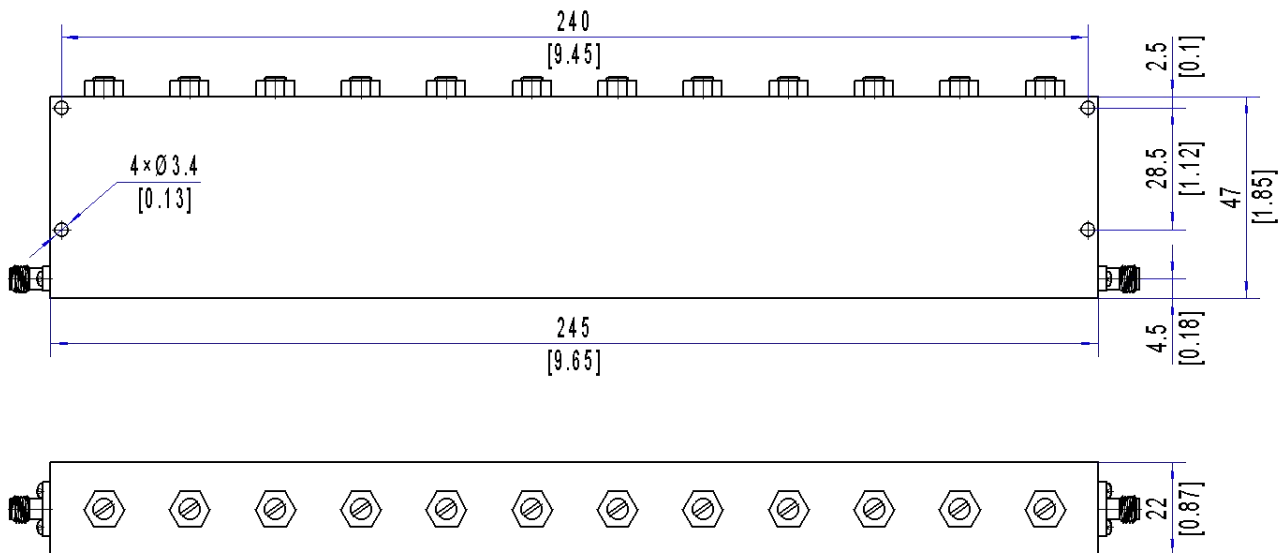

Note 1: Excluding Connector size