


FSBR20-4800-5000-S

Cavity Band Rejection Filter, 4800~5000MHz, 20W, SMA(f)

Electrical Specifications		
1	Stop Band Frequency	4800~5000 MHz
2	Stop Band Attenuation	≥60 dB
3	Pass Band Frequency	DC~4600 MHz , 5200~10500 MHz
4	Insertion Loss	≤1.0 dB
5	VSWR	≤1.7:1
6	Impedance	50Ω
7	Power Handling	20W Max
Environmental Specifications		
1	Operating Temperature	-10°C~+50°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	137*29*11 mm [5.39*1.14*0.43 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

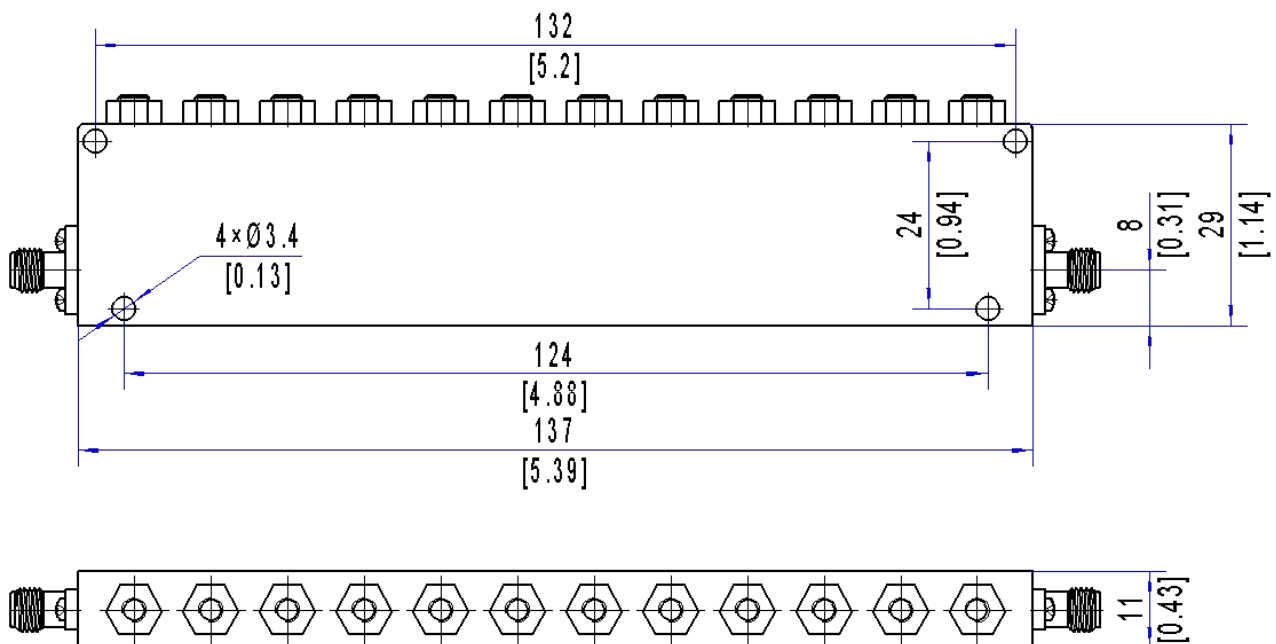

Note 1: Excluding Connector size

