


FSBR5-4400-5000-S

Band Rejection Filter,4400~5000MHz,5W,SMA(f)

Electrical Specifications		
1	Stop Band Frequency	4400~5000 MHz
2	Stop Band Attenuation	≥50 dB
3	Pass Band Frequency	DC~4220MHz,5150~10000MHz
4	Insertion Loss	≤1.0 dB
5	VSWR	≤1.7:1
6	Impedance	50Ω
7	Power Handling	5W Max.
Environmental Specifications		
1	Operating Temperature	-30°C~+70°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Painted Black
3	Dimensions ¹	141*26*16 mm [5.55*1.02*0.63 in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

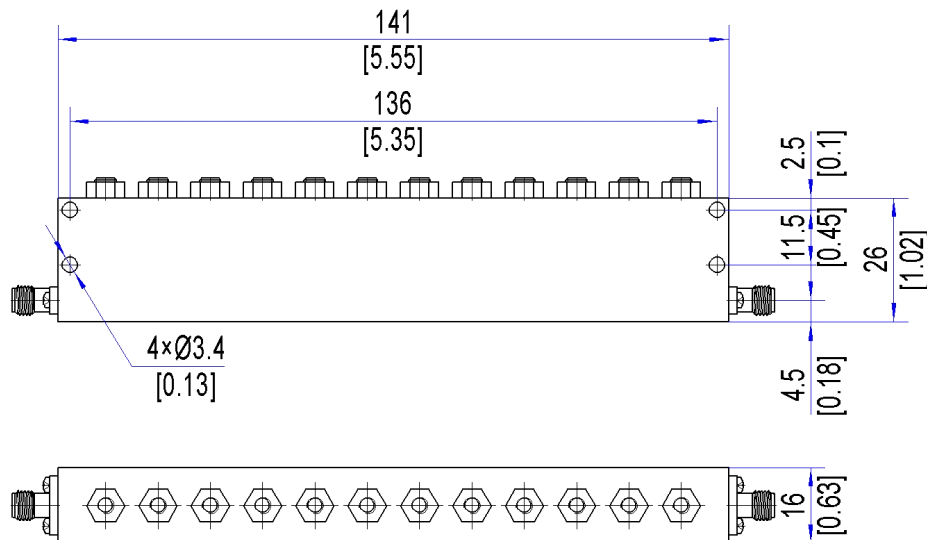

Note 1: Excluding Connector size