


FSCT2-26.5-S

Coaxial Termination, DC-26.5GHz, 2W,SMA

Electrical Specifications		
1	Nominal Impedance	50 Ω
2	Average Power ¹	2W @ 25°C
3	Peak Power	20W (5 μ s pulse width, 1% duty cycle)
4	Frequency Range	DC~26.5GHz
5	VSWR	≤ 1.25
Environmental Specifications		
1	Operating Temperature	-55°C~+125°C
Mechanical Specifications		
1	Connectors	SMA(f)/SMA(m)
2	Body Material	Passivated Stainless Steel

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

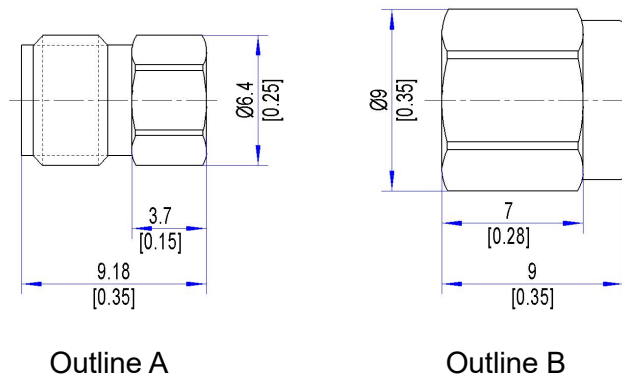

Ordering Information:

Model	Connector Type	Outline Drawing
FSCT2-26.5-S	SMA-Female (default)	Outline A
FSCT2-26.5-SM	SMA-Male	Outline B