


FSDC200-9K-0.5-40-N

Directional Coupler, 200W,9KHz-0.5GHz, 40dB coupling, N(f)

Electrical Specifications		
1	Frequency Range	9 KHz~0.5 GHz
2	Coupling	40 ±1 dB
3	Coupling Flatness	≤ ±0.5 dB
4	Insertion Loss	≤0.5 dB
5	Main Line VSWR	≤1.3:1
6	Directivity	≥20 dB
7	Power	≤200W (CW)
Environmental Specifications		
1	Operating Temperature	-55°C~+85°C
Mechanical Specifications		
1	Connectors	N-Female,SMA-Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	152.4*55.9*55.9mm[6*2.2*2.2in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

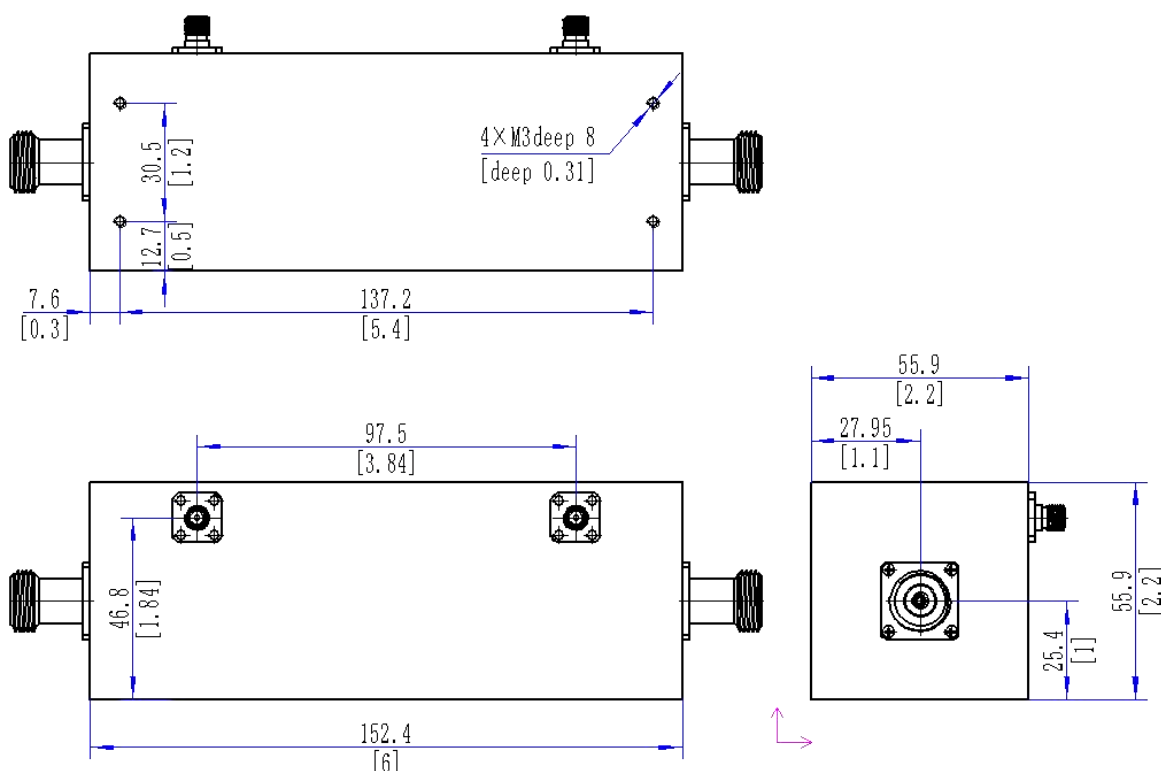

Note 1: Excluding Connector size