


FSDC50-6-18-20-S

Directional Coupler, 50W,6-18GHz, 20dB coupling, SMA(f)

Electrical Specifications		
1	Frequency Range	6~18 GHz
2	Coupling	20 ±1.0 dB
3	Coupling Flatness	≤ ±1 dB
4	Insertion Loss	≤0.6 dB
5	Main Line VSWR	≤1.5:1
6	Secondary Line VSWR	≤1.5:1
7	Directivity	≥12dB
8	Power	50W
Environmental Specifications		
1	Operating Temperature	-45°C~+85°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Dimensions ¹	33*15*11mm[1.3*0.59*0.43in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

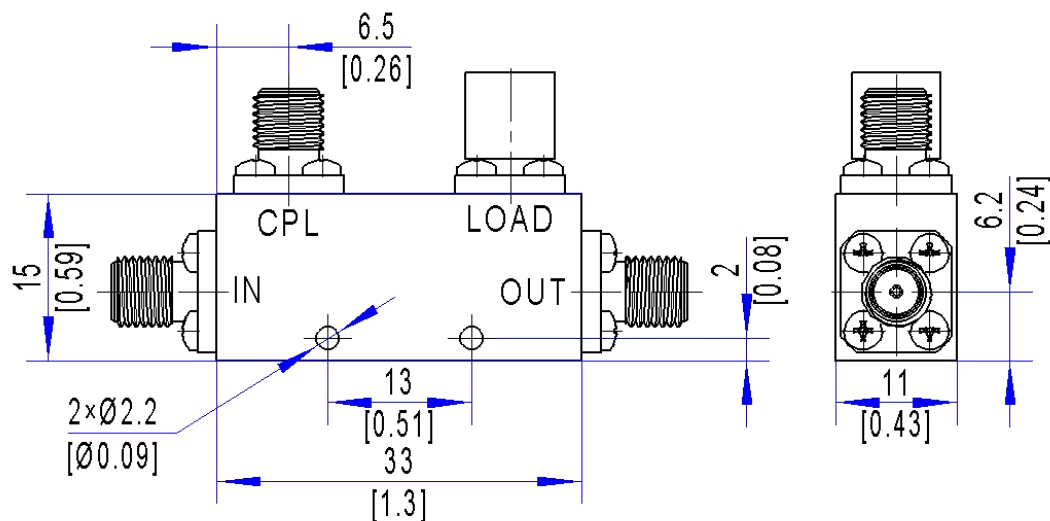

Note 1: Excluding Connector size