


FSFA1K-4-XX-N

Fixed Attenuator, DC-4GHz, 1000W, N

Electrical Specifications		
1	Nominal Impedance	50 Ω
2	Average Power ¹	1000W @ 25°C
3	Frequency Range	DC~4GHz
4	VSWR	≤ 1.35
5	Attenuation (dB)	30/40/50dB
6	Accuracy (dB)	± 2.5
Environmental Specifications		
1	Operating Temperature	-55°C~+125°C
Mechanical Specifications		
1	Connectors	N(m) to N(f)-Standard, Polarity Customizable
2	Body Material	Connector: Brass Heat Sink: Black Anodized Aluminum
4	Dimensions	614*360*140mm [24.17*14.17*5.51in]

Note 1: Refer to the power derating curve for details.

Outline Drawing (Units: mm/[inch], Tolerance: $\pm 2\%$)

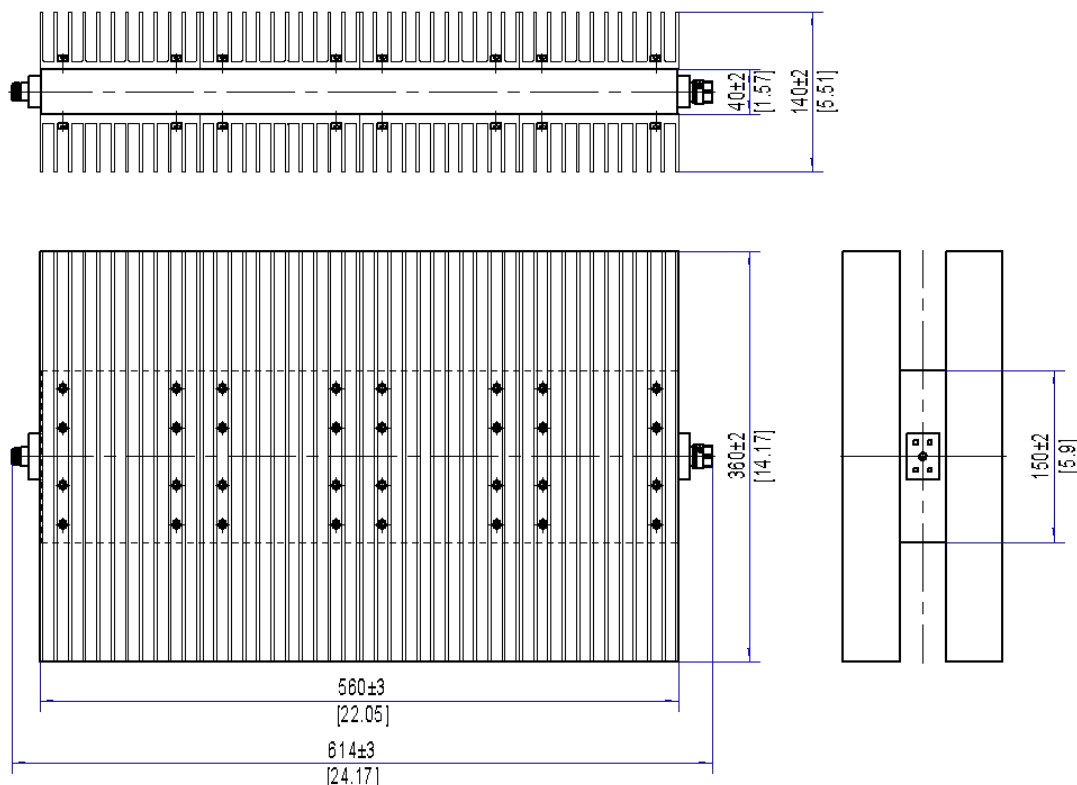

Ordering Information:

Model: **FSFA1K-4-XX-K**

XX = Attenuation Value in dB

Example: 30 dB→**FSFA1K-4-30-K**