


FS047SF1

40GHz, 50 Ohm, Ø1.65mm OD, FEP Jacket, Hand Formable RF Cable.

Cable Construction

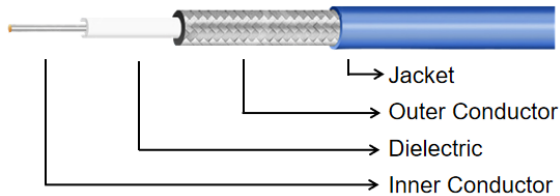

Construction Details

Description	OD (mm)	Material
Inner Conductor	0.29	Silver-plated copper
Dielectric	0.94	PTFE
Outer Conductor	1.19	Tinned copper braid
Jacket	1.65	FEP

Electrical Specifications:

Operating Frequency: DC to 40 GHz

Nominal Impedance: 50 Ω

Signal delay: 4.7ns/m

Velocity of Propagation: 70%

Shielding Effectiveness: ≥100 dB

Dielectric Withstanding Voltage: 500 V DC

Mechanical Specifications:

Minimum Static Bend Radius: 4.0 mm

Minimum Dynamic Bend Radius: 20 mm

Weight: 8 g/m

Environmental Specifications:

Temperature Range: -55 °C to +125 °C

Typical Attenuation(dB/100m)¹ and CW Power handling (W)²

Freq. (GHz)	0.5	1	2	3	6	10	18	26.5	40
Attenuation	82	118	171	213	313	420	595	753	977
CW Power	45	32	23	18	13	10	8	6	5
K1: 3.512916; K2: 0.006852									

1: Typical values at +25°C with VSWR=1.0.

2: Typical values at +40°C, sea level, with VSWR=1.0.

3: Typical Cable Attenuation Calculation Formula: $K1 * \sqrt{F(MHz)} + K2 * F(MHz)$.

4: Typical Connector insertion loss: $0.03 * \sqrt{F(GHz)}$; multiply by the number of connectors.


Connector Options

Connector Type	Male Code	Female Code	Max. Frequency	Max. VSWR
2.92mm	KM	KF	40 GHz	1.30:1
SMP	PM	PF	40 GHz	1.30:1
SMMP	MM	MF	40 GHz	1.30:1
3.5mm	3M	3F	33 GHz	1.30:1
SMA	SM	SF	18 GHz	1.25:1
N	NM	NF	18 GHz	1.25:1
BNC	BM	BF	4 GHz	1.25:1
SMB	EM	EF	4 GHz	1.25:1

Notes:

- Other connector types and configurations are available upon request.
- Add suffix "R" for a right-angle connector and "H" for a bulkhead connector, e.g., SMR and SFH.

Typical Cable Assembly Outline

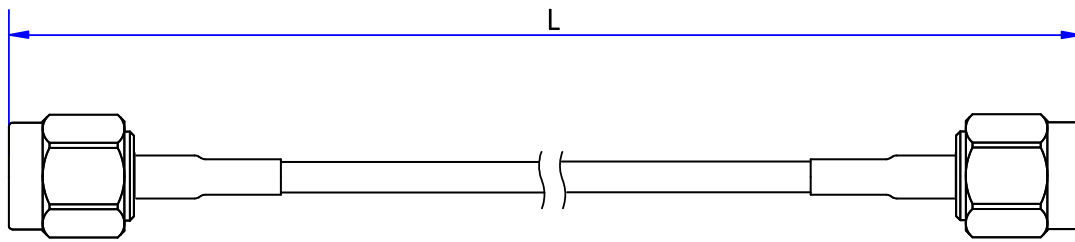

Notes:

- Connector styles shown are for illustration only. Actual connector types and geometries depend on the selected configuration.
- L = cable assembly length. For straight and bulkhead connectors, L is measured end to end. For right-angle connectors, L is measured from the connector centerline.
- Standard label content includes the part number, serial number, and company logo, unless otherwise specified.

Ordering Information

PN: Cable-Max. Freq.-Connector Configuration-Length (m)

E.g.: *FS047SF1-40-KMKF-1* means a FS047SF1 cable assembly, DC to 40 GHz, 2.92mm (m)-2.92mm (m), 1m.

For identical connectors on both ends, add "2" to the connector code, e.g., KM2; otherwise, list both codes in End A-to-End B order, e.g., KMKF.