


FS16PD20-6000-26000-S

16-Way Power Divider / Combiner, 20W, 6-26GHz, SMA(f)

Electrical Specifications		
1	Frequency Range	6.0-26.0 GHz
2	Impedance	50 Ω
3	Insertion Loss	2.5 dB Max. (<i>Above 12.04 dB Theoretical Loss</i>)
4	Isolation	15 dB Min.
5	Input VSWR	2.0:1 Max.
6	Output VSWR	1.6:1 Max.
7	Phase Balance	$\pm 12^\circ$ Max.
8	Amplitude Balance	± 1.0 dB Max.
9	Power Handling @ Common Port	20 W CW (Divider Mode)
10	Power Handling @ Common Port	1 W CW (Combiner Mode)
Environmental Specifications		
1	Operating Temperature	-40°C ~ +85°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Black Paint
3	Dimensions ¹	212x67x10 mm [8.346x2.638x0.394 in]

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

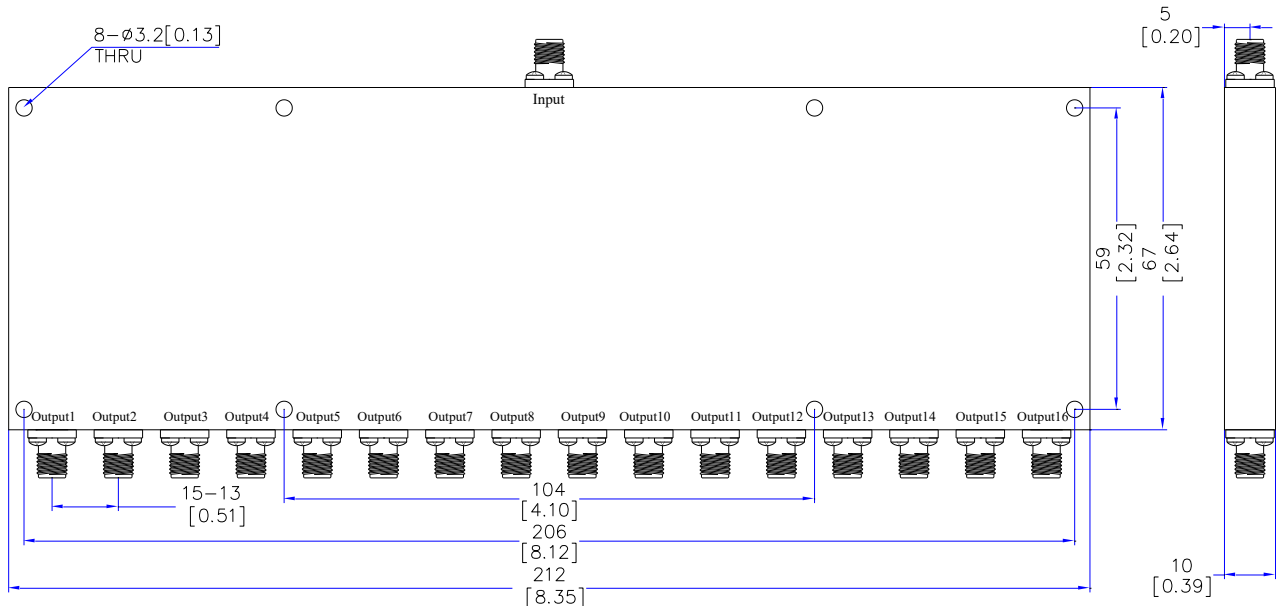

Ordering Information:

Model: **FS16PD20-6000-26000-S**

Note 1: Dimensions do not include connectors.