


FS26TR

26.5GHz, 50 Ohm, Ø7.6mm, PTFE armor, Flexible Cable.

Structure:

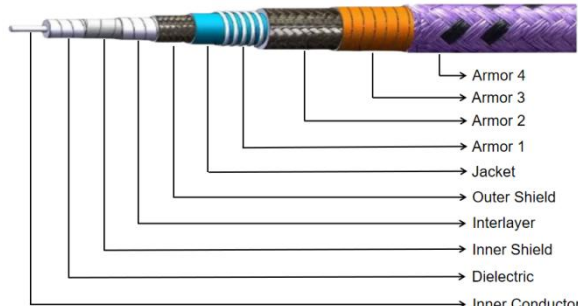

Structure Details:

Cable Type	Dia.(mm)	Material
Inner Conductor	1.44	Silver plated Copper
Dielectric	3.85	Low Density PTFE
Inner Shield	4.05	Silver Plated Copper Strip
Interlayer	4.30	Low Density PTFE
Outer Shield	4.65	Silver Plated Copper Braid
Jacket	5.10	FEP
Armor* 1-2	6.70	Silver plated Copper
Armor* 3-4	7.60	PTFE

*Armor is optional. Without armor, cable designation is FS26T. With armor, the cable designation is FS26TR.

Electrical Specifications:

Operating Freq.:26.50 GHz

Cut-off Freq.: 29 GHz

Impedance: 50 Ω

VSWR: ≤1.25@26.5 GHz

Phase Stability⁵: ±5°

Amplitude Stability⁵: ±0.05dB

Velocity of Propagation: 82%

Shielding Effectiveness: >90 dB

Dielectric Withstanding Voltage: 1500 V DC

Mechanical Specifications:

Static Bending Radius: 25.5 mm (without armor)
38 mm (with armor)

Dynamic Bending Radius: 51 mm (without armor)
76 mm (with armor)

Bending Life: 0.6M; Mating Cycles: 2000 Cycles

Weight: 55 g/m (without armor)
135 g/m (with armor)

Environmental Specifications:

Temperature: -55~+125 °C

Typical Attenuation(dB/100m) and Power handling (W)

Freq.(GHz)	1	2	3	6	8	10	12.4	18	26.5
Attenuation ¹	27.1	38.9	48.1	69.6	81.3	91.9	103.5	127.4	158.8
Avg. Power ²	821	573	463	320	274	242	215	175	140
K1: 0.828800, K2: 0.000900									

1: Typical value@+25 °C,VSWR=1.0;

2: Typical value@+40 °C,atmospheric pressure;

3: Typical Cable Attenuation Calculation, Formula: $K1*\sqrt{F(\text{MHz})} + K2*F(\text{MHz})$;

4: Typical Connector Attenuation Calculation, Formula: $0.03*\sqrt{F(\text{GHz})}$.

5: Based on 360°bending on a Ø76 mm mandrel

Cable Assemblies Naming Rule:

PN: Cable-Max. Freq.-Conn.1-Conn.2-Length(m)

Eg.: FS26TR-26.5-SM-SF-1 means FS26TR armored cable, DC-26.5GHz, SMA(m)-SMA(f), 1m.

Add "R" for right-angle or "H" for bulkhead after the connector code (e.g., NMR, NFH)

Connector Options	2.92mm (K)	3.5mm (3)	SMA (S)	N (N)	TNC(T)
Frequency (Max)	40GHz	33GHz	26.5GHz	18GHz	18GHz
VSWR (Max)	1.25:1	1.25:1	1.25:1	1.25:1	1.25:1