


FS2PD20-698-3000-S

2-Way Power Divider / Combiner, 20W, 0.698-3GHz, SMA(f)

Electrical Specifications		
1	Frequency Range	0.698-3.0 GHz
2	Impedance	50 Ω
3	Insertion Loss	0.6 dB Max. (<i>Above 3.01 dB Theoretical Loss</i>)
4	Isolation	20 dB Min.
5	Input VSWR	1.25:1 Max.
6	Output VSWR	1.20:1 Max.
7	Phase Balance	$\pm 2^\circ$ Max.
8	Amplitude Balance	± 0.2 dB Max.
9	Power Handling @ Common Port	20 W CW (Divider Mode)
10	Power Handling @ Common Port	1 W CW (Combiner Mode)
Environmental Specifications		
1	Operating Temperature	-40°C ~ +70°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Sandblasting Natural Color Conductive Oxide
3	Dimensions ¹	43.8x28.3x13.2 mm [1.724x1.114x0.52 in]

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

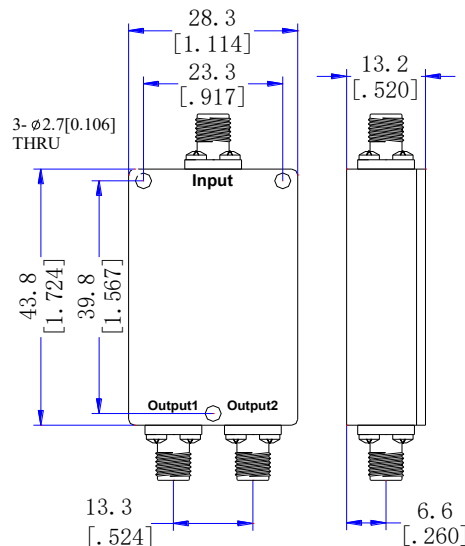

Ordering Information:

Model: **FS2PD20-698-3000-S**

Note 1: Dimensions do not include connectors.