


FS2PD200-400-1000-S

2-Way Power Divider / Combiner, 200W, 0.4-1GHz, SMA(f)

Electrical Specifications		
1	Frequency Range	0.4-1.0 GHz
2	Impedance	50 Ω
3	Insertion Loss	0.5 dB Max. (<i>Above 3.01 dB Theoretical Loss</i>)
4	Isolation	15 dB Min.
5	Input VSWR	1.25:1 Max.
6	Output VSWR	1.25:1 Max.
7	Phase Balance	$\pm 5^\circ$ Max.
8	Amplitude Balance	± 0.20 dB Max.
9	Power Handling @ Common Port	200 W CW (Divider Mode)
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Silver Plating
3	Dimensions ¹	60.96x60.96x18 mm [2.4x2.4x0.71 in]

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

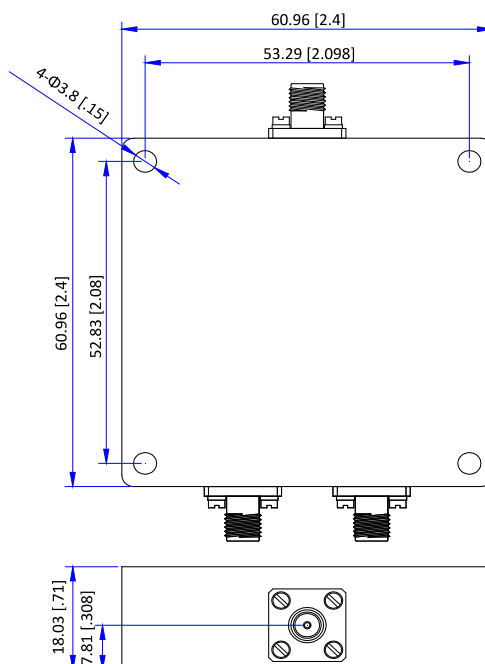

Ordering Information:

Model: **FS2PD200-400-1000-S**

Note 1: Dimensions do not include connectors.