


FS2PD30-500-18000-S

2-Way Power Divider / Combiner, 30W, 0.5-18GHz, SMA(f)

Electrical Specifications		
1	Frequency Range	0.5-18.0 GHz
2	Impedance	50 Ω
3	Insertion Loss	1.0 dB Max. (<i>Above 3.01 dB Theoretical Loss</i>)
4	Isolation	16 dB Min. (24 dB Typ.)
5	Input VSWR	1.50:1 Max.
6	Output VSWR	1.50:1 Max.
7	Phase Balance	± 0.3 dB Max.
8	Amplitude Balance	$\pm 4^\circ$ dB Max.
9	Power Handling @ Common Port	30 W CW (Divider Mode)
10	Power Handling @ Common Port	1 W CW (Combiner Mode)
Environmental Specifications		
1	Operating Temperature	-45°C ~ +85°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Black Paint
3	Dimensions ¹	157x26x10mm [6.181x1.024x0.394 in]
4	Weight	Approx. 120 g

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

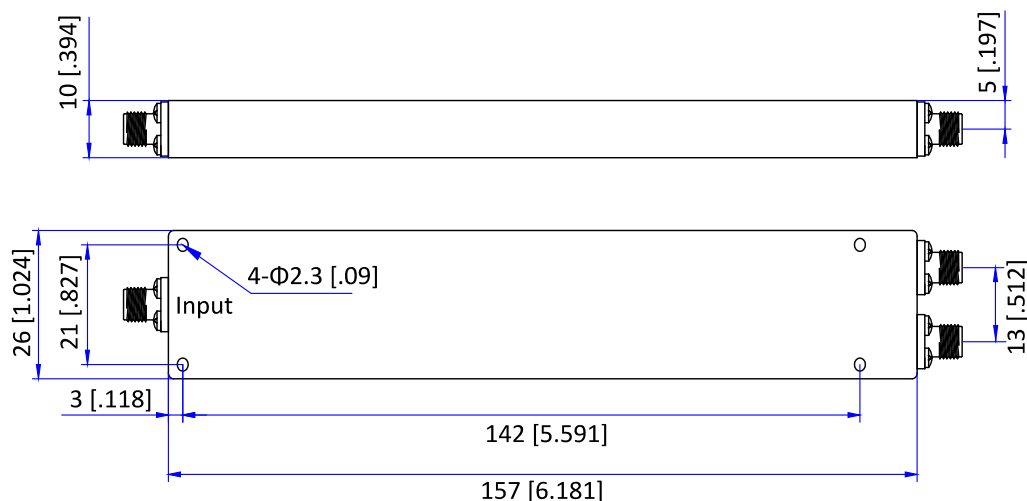

Ordering Information:

Model: **FS2PD30-500-18000-S**

Note 1: Dimensions do not include connectors.