


FS3PD2-0-6000-S

3-Way Resistive Power Divider, DC-6GHz, SMA-Female

Electrical Specifications		
1	Frequency Range	DC-6.0 GHz
2	Impedance	50 Ω
3	Insertion Loss	6.0 dB Max.
4	Isolation	9 dB Min.
5	Input VSWR	1.4:1 Max.
6	Output VSWR	1.4:1 Max.
7	Phase Balance	$\pm 4^\circ$ Max.
8	Amplitude Balance	± 0.4 dB Max.
9	Power Handling @ Common Port	2 W
Environmental Specifications		
1	Operating Temperature	-35°C ~ +75°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finish	Sandblasting Natural Color Conductive Oxide
3	Dimensions ¹	45x34x12.5 mm [1.77x1.34x0.49 in]

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

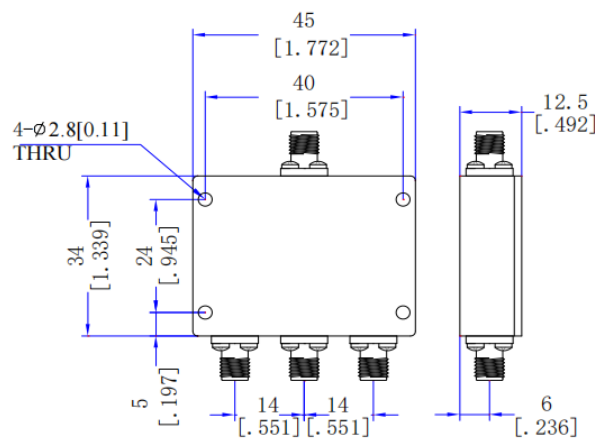

Ordering Information:

Model: **FS3PD2-0-6000-S**

Note 1: Dimensions do not include connectors.