


FS4PD15-6000-26500-K

4-Way Power Divider / Combiner, 15W, 6-26.5GHz, 2.92mm(f)

Electrical Specifications		
1	Frequency Range	6.0-26.5 GHz
2	Impedance	50 Ω
3	Insertion Loss	1.9 dB Max. (Above 6.02 dB Theoretical Loss)
4	Isolation	16 dB Min.
5	Input VSWR	1.60:1 Max.
6	Output VSWR	1.60:1 Max.
7	Phase Balance	±3° Max.
8	Amplitude Balance	±0.3 dB Max.
9	Power Handling @ Common Port	15 W CW (Divider Mode)
10	Power Handling @ Common Port	1 W CW (Combiner Mode)
Environmental Specifications		
1	Operating Temperature	0°C ~ +55°C
2	Storage Temperature	-40°C ~ +75°C
Mechanical Specifications		
1	Connectors	2.92mm-Female
2	Surface Finish	Black Paint
3	Dimensions ¹	50.8x38.1x10 mm [2.000x1.500x0.394 in]
4	Weight	Approx. 100g

Outline Drawing (Dimension in mm [in], Tolerance: $\pm 0.3\text{mm}$ [± 0.01 in])

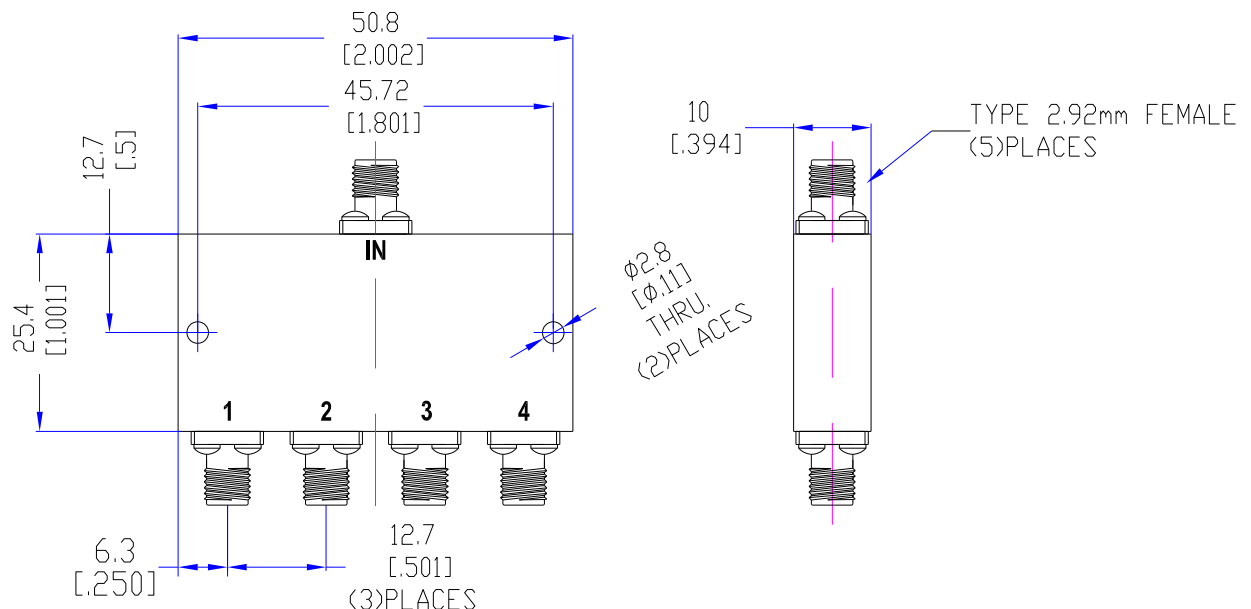

Ordering Information:

Model: **FS4PD15-6000-26500-K**

Note 1: Dimensions do not include connectors.