


FS4PD20-18000-26500-K

4-Way Power Divider / Combiner, 20W, 18-26.5GHz, 2.92mm(f)

Electrical Specifications		
1	Frequency Range	18.0-26.5 GHz
2	Impedance	50 Ω
3	Insertion Loss	2 dB Max. (Above 6.02 dB Theoretical Loss)
4	Isolation	16 dB Min.
5	Input VSWR	1.60:1 Max.
6	Output VSWR	1.50:1 Max.
7	Phase Balance	$\pm 5^\circ$ Max.
8	Amplitude Balance	± 0.5 dB Max.
9	Power Handling @ Common Port	20 W CW (Divider Mode)
10	Power Handling @ Common Port	0.5 W CW (Combiner Mode)
Environmental Specifications		
1	Operating Temperature	-40°C ~ +70°C
Mechanical Specifications		
1	Connectors	Input: 2.92mm-Male, Output: 2.92mm-Female
2	Surface Finish	Black Paint
3	Dimensions ¹	58.42 x 19 x 10 mm [2.302 x 0.748 x 0.394 in]

Outline Drawing (Dimension in mm [in], Tolerance: ± 0.3 mm [± 0.01 in])

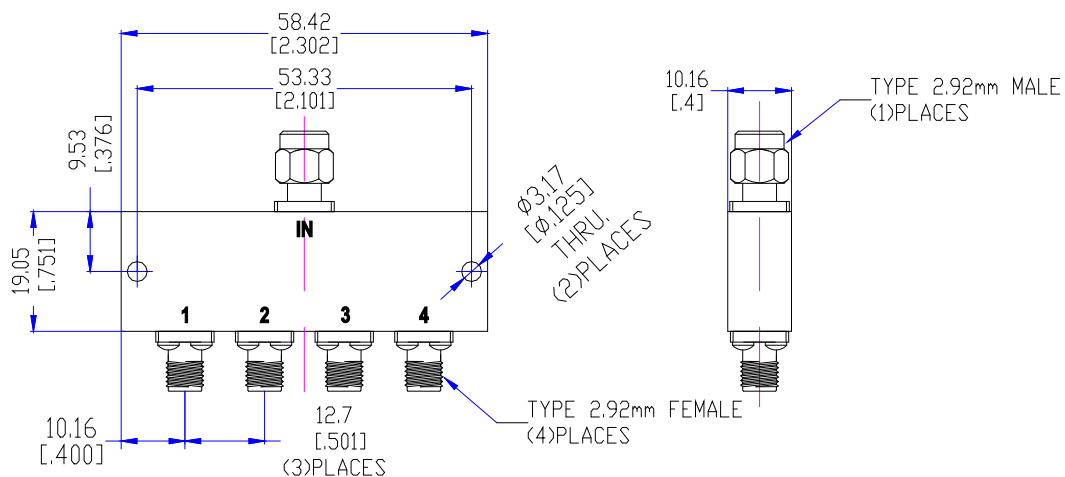

Ordering Information:

Model: **FS4PD20-18000-26500-K**

Note 1: Dimensions do not include connectors.