


FS6PD30-800-2500-S

6-Way Power Divider, 30W, 800~2500MHz,SMA(f)

Electrical Specifications		
1	Frequency Range	800~2500MHz
2	Insertion Loss	≤1.2 dB (Excluding theoretical loss 7.8 dB)
3	Input Port VSWR	≤1.50:1
4	Isolation	≥18dB
5	Amplitude Balance	≤±0.6 dB
6	Phase Balance	≤±5°
7	Power	Forward Power 30W; Reverse Power 1W
8	Impedance	50Ω
Environmental Specifications		
1	Operating Temperature	-30°C~+70°C
Mechanical Specifications		
1	Connectors	SMA-Female
2	Surface Finishing	Natural Conductive Oxidation
3	Dimensions ¹	92*86*10mm[3.62*3.39*0.39in]

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

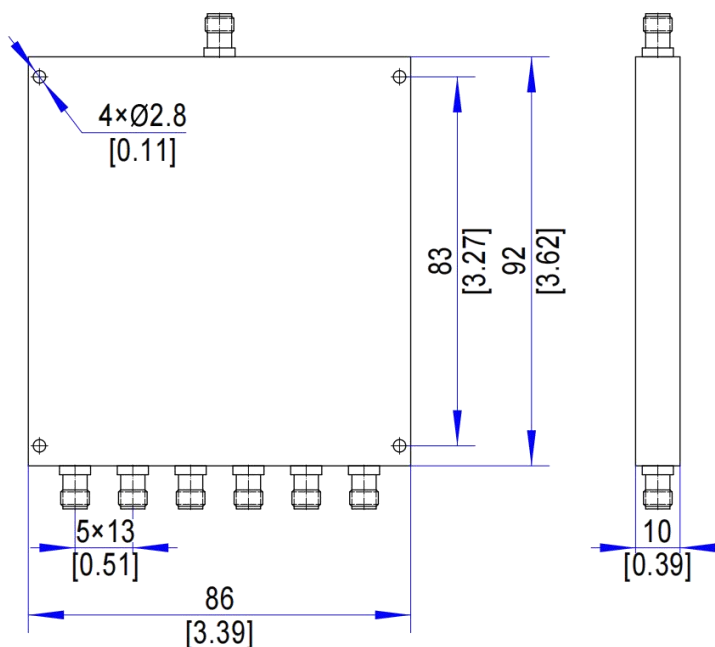

Note 1: Excluding Connectors