


FS8PD150-400-2000-N

8-Way Power Divider, 150W, 400-2000MHz, N(f)

Electrical Specifications		
1	Frequency Range	400-2000MHz
2	Insertion Loss	≤2.0 dB (Excluding theoretical loss 9.03 dB)
3	Isolation	17dB min.
4	Input Port VSWR	≤1.55:1
5	Output Port VSWR	≤1.40:1
6	Phase Balance	≤±5°
7	Amplitude Balance	≤±0.4dB
8	Average Power as Divider	150W
9	Average Power as Combiner	10W
10	Impedance	50Ω
Environmental Specifications		
1	Operating Temperature	-40°C~+85°C
Mechanical Specifications		
1	Connectors	N-Female
2	Protection against corrosion	Sandblasted Natural Conductive Oxidation
3	Dimensions ¹	232*148*20mm[9.13*5.83*0.79in]
4	Weight	Approx. 1.5KG

Outline Drawing (Units: mm/[inch], Tolerance: ±0.3mm)

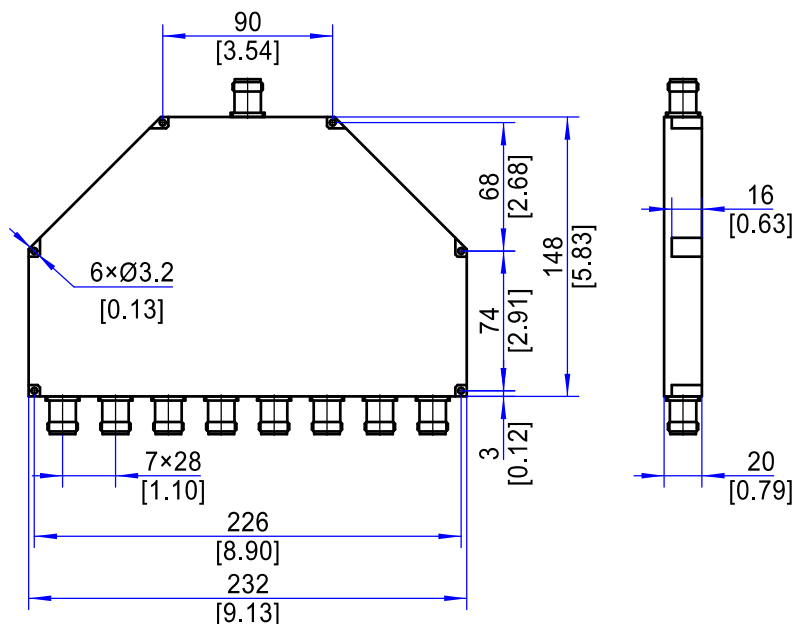

Note 1: Excluding Connectors